



ONE STOP SOLUTION TOOLS

WELDING EQUIPMENT SOLUTIONS



HANGZHOU HAOHE TECHNOLOGY CO.,LTD.

Crystal Zhao / +86 1328 2376 887

Email: crystal@hochtools.com

Add: No. 151 Jiangong Road, Gongshu District, Hangzhou City, Zhejiang Province, China



EXCLUSIVE
USA



CNC PLASMA CUTTING MACHINES TABLES


Own Every Stage of Your Customers' Growth with 4 Sizes + Robot/Laser Hybrids

HOTECH 卓

2ft x 2ft



4ft x 4ft

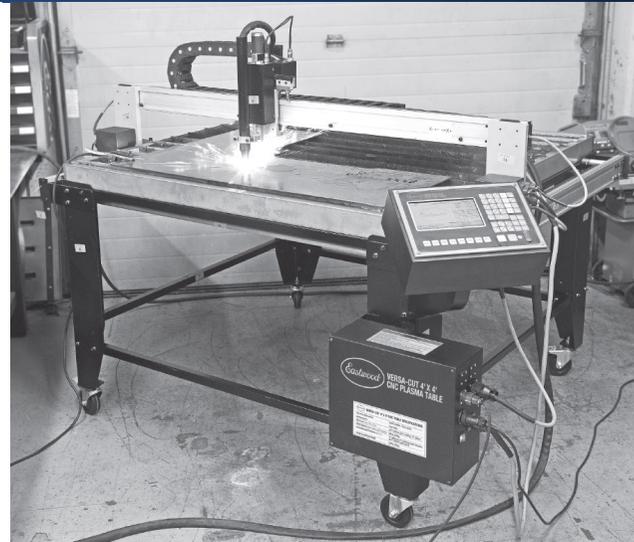

Unified Tech Support for All Tables
+/-0.5mm Tolerance Guaranteed
18% Material Waste Reduction = Pure Profit

5ft x 5ft



4ft x 8ft





2' X 2' CNC PLASMA TABLE- HT-2200DCCM

2' X 2' CNC PLASMA TABLE- HT-2200DCCM

HOTECH 卓

- Designed for the hobbyist
- Loaded with professional features
- Integrated Cut controller, Water Table, Teeth Slats, Swivel Casters with Locking, Torch Height Control, and limit Switches
- All in one low price package



SPECIFICATIONS

Plasma Table Power Requirements:	120±10% VAC, 50/60 Hz, 5A
Plate Capacity:	24" x 36" x 0.25" thick
Weight Capacity (Includes workpiece and full Waterbed):	200 lbs. [90kg]
Waterbed Fluid Capacity:	10.4 gal [39.4L]
CNC Torch Travel:	
X-Axis:	24.0" [610mm]
Y-Axis:	24.0" [610mm]
Z-Axis:	1.96" [50mm]
Waterbed Dimensions:	
X-Axis:	27.75" [705mm]
Y-Axis:	40.06" [1018mm]
Z-Axis:	2.17" [55mm]
Overall Assembled Dimensions (W x D x H):	52.5" [1333mm] x 55.0" [1397mm] x 60.5" [1536mm]
Overall Assembled Unit Weight:	158.7 lbs. [72kg]
Movement Accuracy:	±0.2mm
Cutting Accuracy:	±0.5mm

MODEL NO.: HT-2200DCCM

MOQ: 168pcs

WHAT IS DIFFERENT



OURS

**2x40HQ/
each Month**

**ON THE
MARKET**

Integrated limit Switches

Additional X-Axis Gantry Support Roller Assembly

Integrated Torch Height Control

19pcs Teeth Slats

Water Table

Integrated Emergency Stop

Integrated Cut controller

4pcs Ø64mm (2.52") Casters
80kg Weight capacity
Swivel with Locking (Wheel Brake)

**EXCLUSIVE
USA**

ONE STOP SOLUTION

They need to use laptop
We have intergrated CNC system controller



NO height adjustment

NO CNC system controller

No support

No water tray



PRICE LEVEL

HOTECH 

MODEL NO.: HT-2200DCM

MOQ: 168pcs



EXCLUSIVE
USA

With this cost still NO Integrated Cut controller

No Additional X-Axis Gantry Support Roller Assembly

No Integrated Torch Height Control

No Integrated Emergency Stop

No Teeth Slats



 [ORDER NOW](#)

\$2375

+\$149 flat rate shipping to contiguous USA.
Shipping 1 week

ONE STOP

Heavy Duty Packaging – Strong carton + Inside Overall Foam Protection



Box A



Box A Cover



Box B First Layer




Box B Top Layer



Box B Cover



DROP TEST
PASS

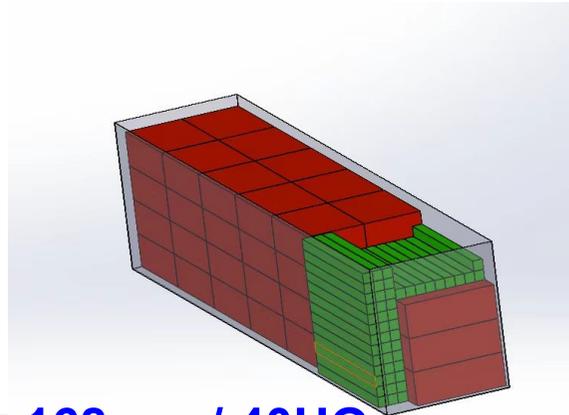

168pcs / 40HQ



EXCLUSIVE
USA




4' X 4' CNC PLASMA TABLE- HT-44CPCT

4' X 4' CNC PLASMA TABLE- HT-44CPCT

HOTECH 卓

- Designed for the hobbyist
- Loaded with professional features
- Integrated Cut controller, Water Table, Teeth Slats, Swivel Casters with Locking, Torch Height Control, Emergency Stop and limit Switches
- All in one low price package

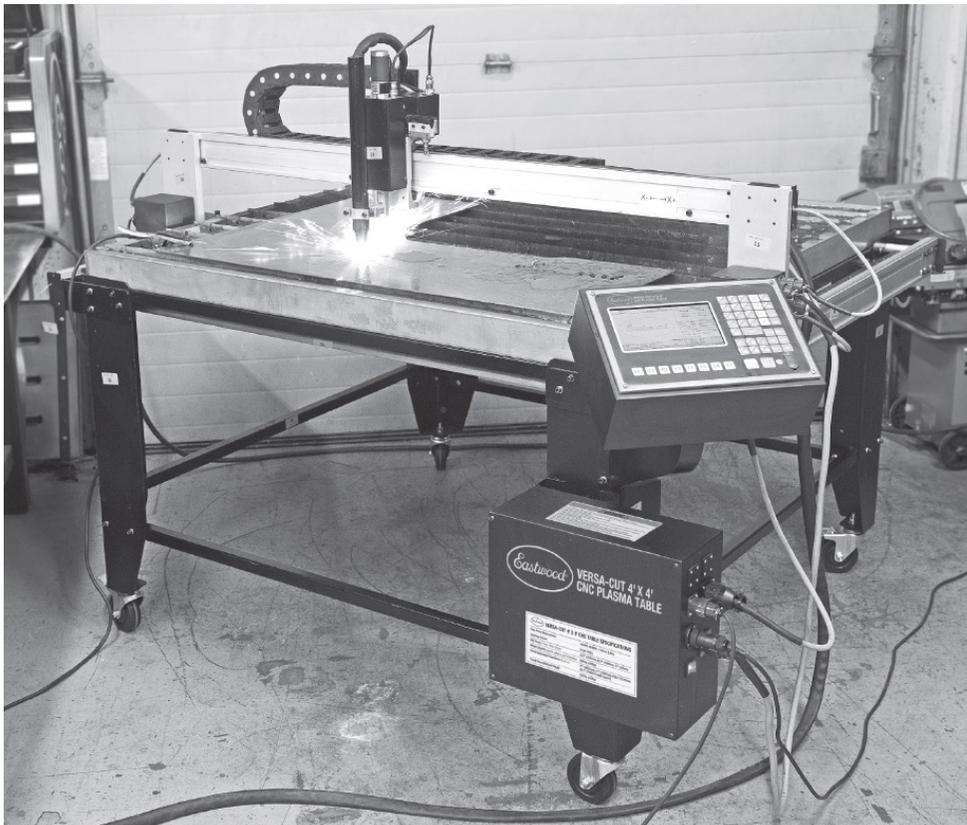

SPECIFICATIONS

Plasma Table Power Requirements:	120±10% VAC, 50/60 Hz, 5A
Plate Capacity:	48" x 48" x 0.25" thick
Weight Capacity (Includes workpiece and full Waterbed):	474 lbs. [215kg]
Waterbed Fluid Capacity:	33.0 gal [125L]
CNC Torch Travel:	
X-Axis:	49.2" [1250mm]
Y-Axis:	43.3" [1100mm]
Z-Axis:	2.1" [54mm]
Assembled Waterbed Dimensions:	
X-Axis:	52.5" [1335mm]
Y-Axis:	52.8" [1340mm]
Z-Axis:	2.75" [70mm]
Overall Assembled Dimensions (W x D x H):	77" [1955mm] x 71" [1800mm] x 50.0" [1270mm] (55.1" [1400mm] with casters)
Overall Assembled Unit Weight:	355 lbs. [161kg]
Movement Accuracy:	±0.2mm
Cutting Accuracy:	±0.5mm

**EXCLUSIVE
USA**

MODEL NO.: HT-44CPCT


MOQ: 75pcs

FEATURES

HOTECH 卓

- Oversized waterbed accepts standard 4-ft. x 4-ft. pre-cut sheet materials
- Intuitive color LCD screen interface and USB drive for ease of use
- Dedicated CNC controller eliminates the need for a separate laptop
- User-friendly controller is easy for beginners, but packed with pro features
- Robust stepper motors for long life and accurate cut movements
- Large waterbed holds up to 33 gallons of cutting fluid
- Ready to assemble, all hardware included
- Includes locking casters for convenient movement and storage
- Strong steel frame assures a rock-solid foundation
- Rigid design for precise gantry movements and cutting accuracy
- CNC cutting table operates on 120V AC / 230V AC
- Torch travel is 49.2-in. X-Axis; 43.3-in. Y-Axis

EXCLUSIVE
USA

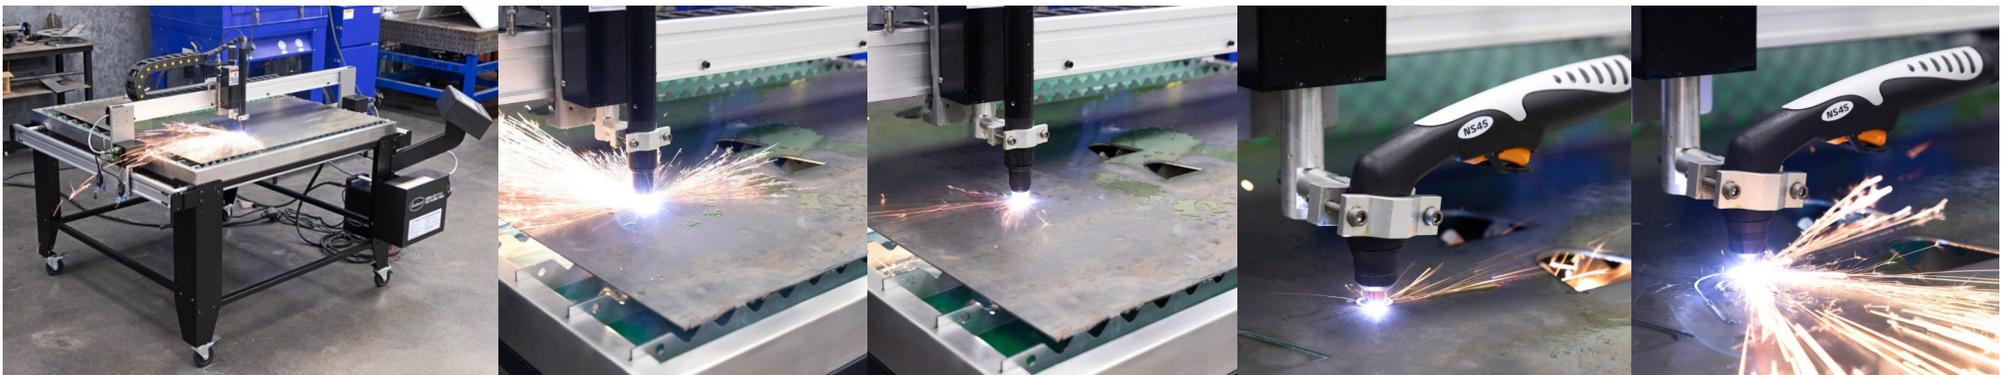

FEATURES

HOTECH 



Overview

**EXCLUSIVE
USA**



Integrated limit Switches




Integrated Torch Height Control



Drag Chain

FEATURES

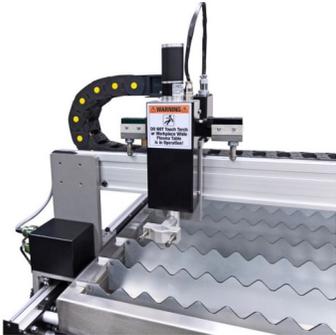

Torch Holder



Top View



Integrated Cut controller




**EXCLUSIVE
USA**



Emergency Stop




Heavy duty cables and plugs

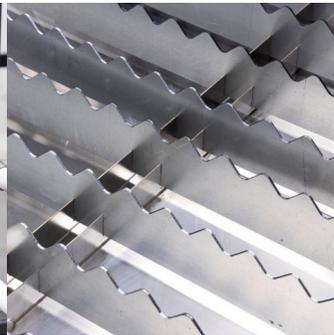

Teeth Slats



Gearing

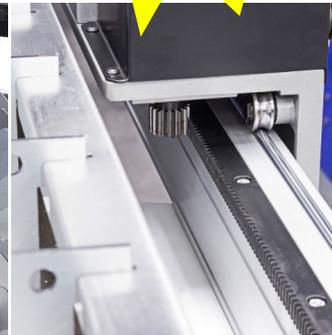

4 Casters Swivel
with Locking

PRICE LEVEL



MODEL NO.: HT-44CPCT

MOQ: 150pcs

- With this cost still NO Integrated Cut controller
- Size ONLY 4x3 Feet
- No Drag Chain
- No Integrated Torch Height Control
- No Integrated Emergency Stop
- No Teeth Slats
- No 4 Casters Swivel with Locking



EXCLUSIVE USA



ORDER NOW

~~\$3580~~ **\$3329**
+\$249 flat rate shipping to contiguous USA.

ONE

Heavy Duty Packaging - **Wooden Crate + Inside Overall Foam Protection**



First Layer



Cover



Top Layer



Wooden Crate



Metal Strips

**EXCLUSIVE
USA**

**DROP TEST
PASS**



**EXCLUSIVE
USA**

75 Units/40HQ



**EXCLUSIVE
USA**

4' x 8' FEET CNC PLASMA CUTTING TABLE – H48PCT

4x8 FEET CNC PLASMA CUTTING TABLE – H48PCT



Remote Control



EXCLUSIVE USA

X&Y Axis Chain Drag



LED Light with Logo



6pcs Adjustable feet



Same Features as 4X4 CNC Plasma Table

With laser cut **LOGO & LED Light** for more industrial looking

Integrated Cut controller, Water Table with **Teeth Slats**, Torch Height Control, limit Switches, Emergency Stop, 6pcs Adjustable feet, Big LCD screen interface and USB drive,


Robust stepper motors

Overall Size: 10' * 6.4' * 4' (3172*1951*1237mm)


Cutting Capacity: 8' * 4' Feet (2450*1220mm)

MOQ: 44PCS

3pcs Water Tray Included

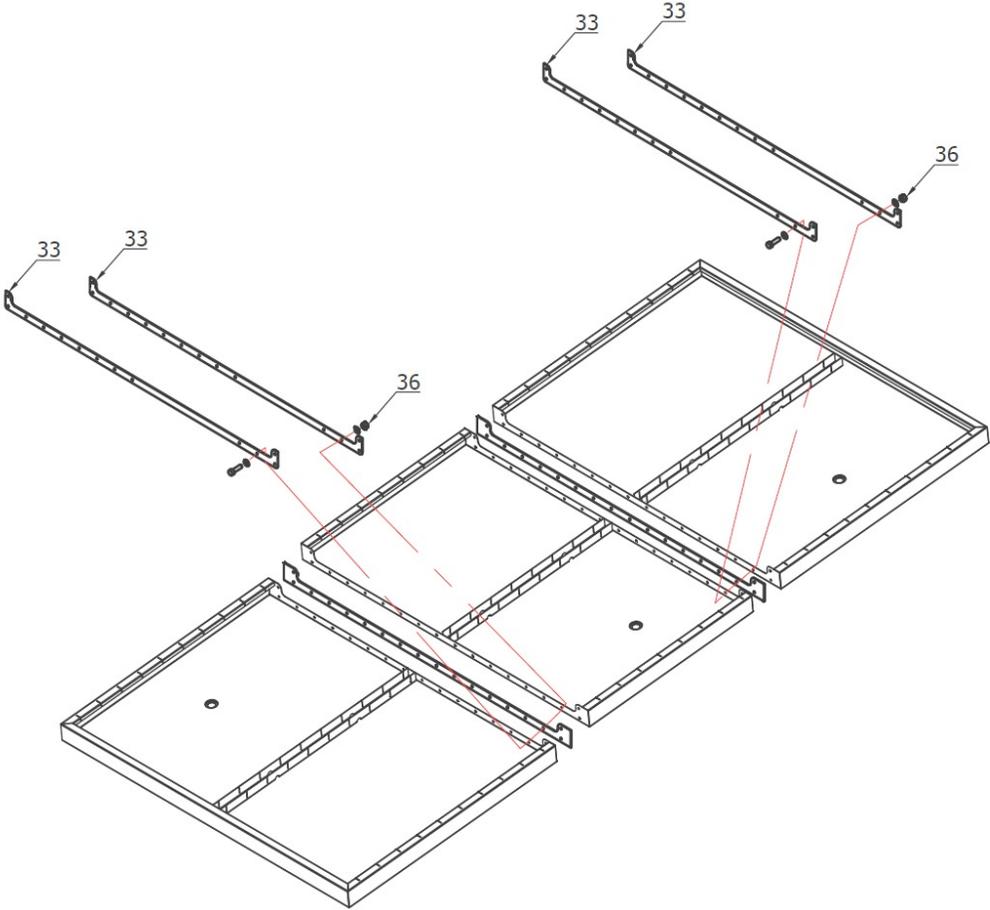

EXCLUSIVE
USA

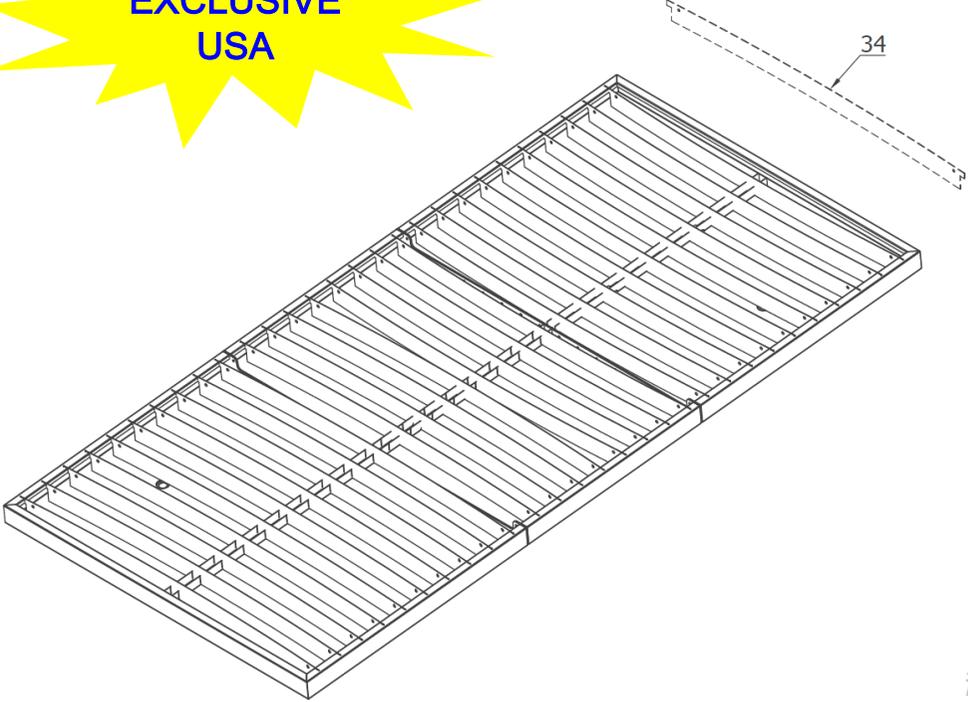

WITH ALL FEATURES THAT **4' X 4' CNC PLASMA TABLE HT-44CPCT** HAS

HOTECH 

- Ovesized waterbed accepts standard 4-ft. x 8-ft. pre-cut sheet materials
- Intuitive color LCD screen interface and USB drive for ease of use
- Dedicated CNC controller eliminates the need for a separate laptop
- User-friendly controller is easy for beginners, but packed with pro features
- Robust stepper motors for long life and accurate cut movements
- Large waterbed 3pcs for easy transportation
- Ready to assemble, all hardware included
- Includes locking casters for convenient movement and storage
- Strong steel frame assures a rock-solid foundation
- Rigid design for precise gantry movements and cutting accuracy
- CNC cutting table operates on 120V AC / 230V AC
- Overall Size: 10' * 6.4' * 4' (3172*1951*1237mm)
- Cutting Capacity: 8' * 4' Feet (2450*1220mm)

**EXCLUSIVE
USA**



Heavy Duty Packaging - **Wooden Crate + Inside Overall Foam Protection**



First Layer



Cover




Top Layer



Wooden Crate



Metal Strips

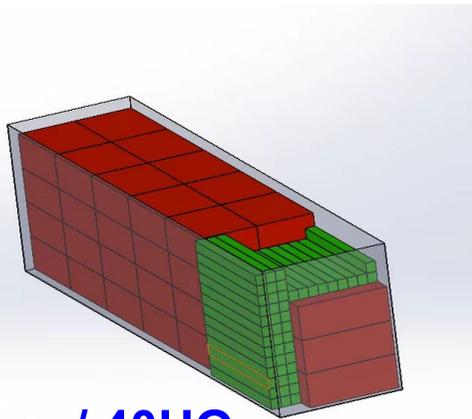

44pcs / 40HQ





**EXCLUSIVE
USA**

5ft x 5ft CNC PLASMA CUTTING TABLE – H1355PCT

CNC Plasma Cutting table 5x5feet - H1355PCT

HOTECH 卓



MOQ: 60PCS

Same Features as 66726 Eastwood Versa Cut 4X4 CNC Plasma Table

With **EASTWOOD laser cut LOGO** for more industrial looking

Integrated Cut controller, Water Table,
Torch Height Control, limit Switches, Emergency Stop, **6pcs** Casters with Lock, Big
LCD screen interface and USB drive, Robust stepper motors

With X-Axis & Y-Axis Chain drag

Strong frame for breaking into 2 sections to ship in one wooden crate

Overall Size: 7.38'x 7.38'x4.4' (2250x2250x1340mm)

Cutting Capacity (X-Axis & Y-Axis) : **5' x5' Feet** (1524x1524 mm)

•**Torch Lifter Z-Axis Travel:** 54 mm

•**Machine Weight :** 240 kg

(Without Wooden Crate, After Installation)

Machine Weight (Including Wooden Crate): 302 kg

•**Machine Precision:** ± 0.2 mm

•**Maximum Load Capacity:**

•Supports up to 350 kg (based on a 20mmx1500mmx1500mm steel plate)

•**Two casters closeable:**

•Polyurethane Casters (Single-Wheel Load Capacity):

•Single Wheel Capacity: 500 kg



•Total Load Capacity (6-Wheel Configurations): **1000 kg**

•Threaded Stem Casters (Single-Wheel Load Capacity):


•Single Wheel Capacity: 250 kg

•Total Load Capacity (6-Wheel Configurations): **750 kg**

CNC Plasma Cutting table 5x5feet - H1355PCT

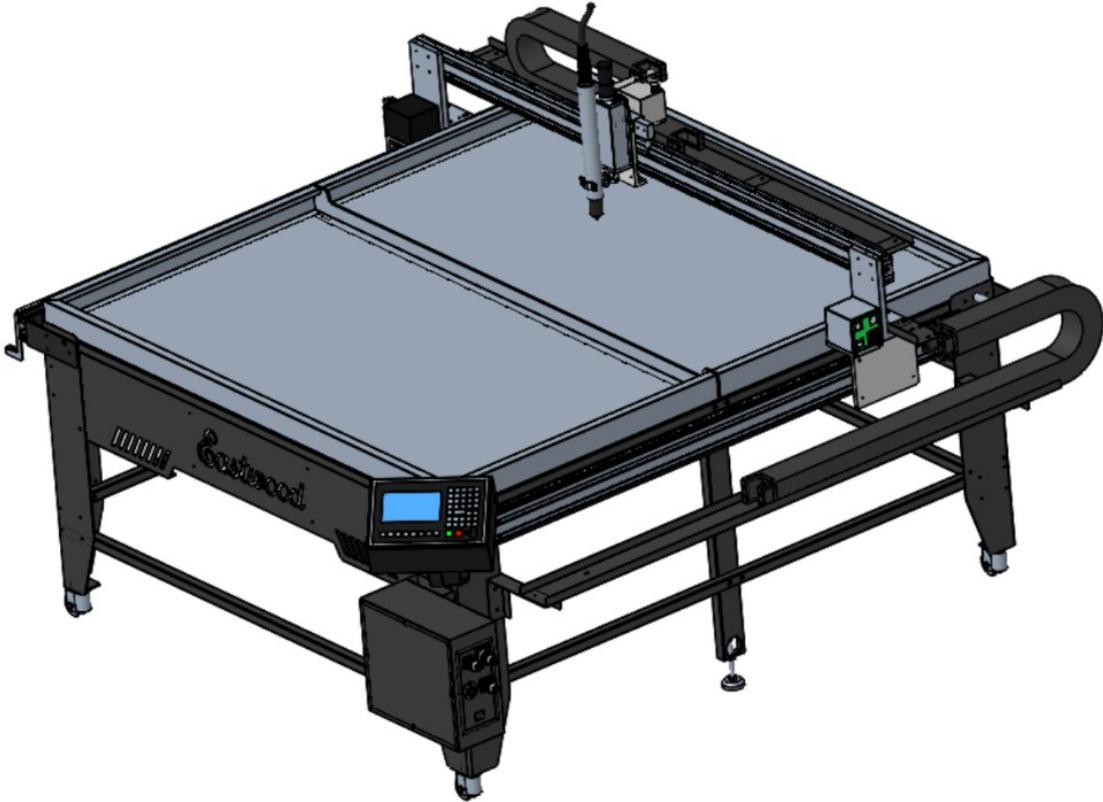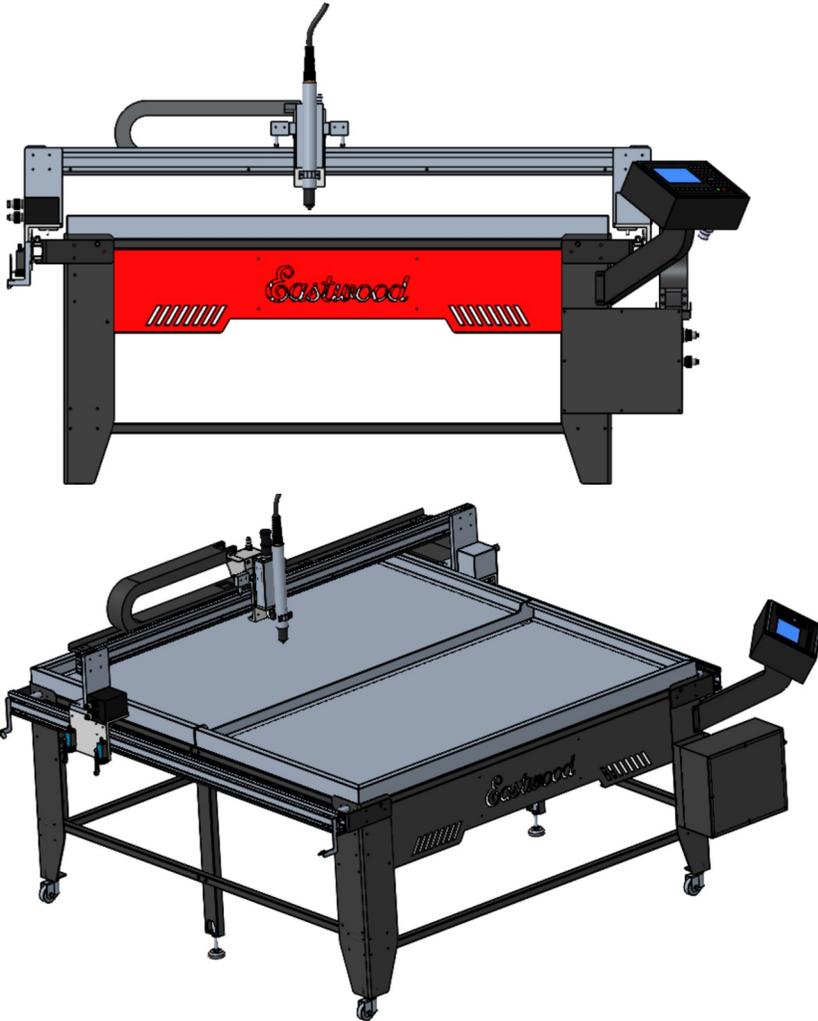

Heavy Duty Packaging - Wooden Crate + Inside Overall Foam Protection

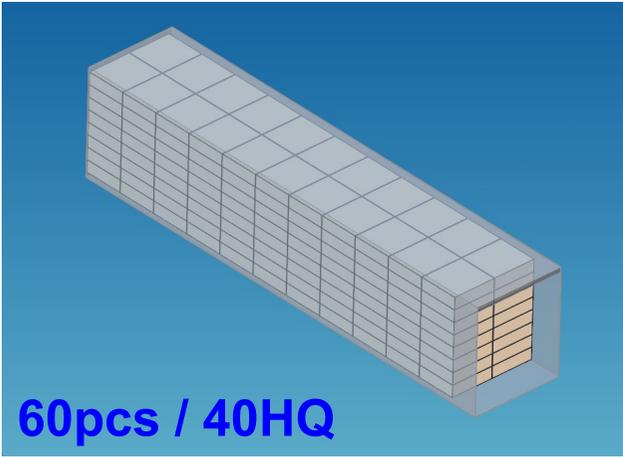

Wooden Crate Size: 2100*970*530mm
Gross Weight: 302kgs
40HQ Quantity: 60Units





CNC Tube cutting plasma table attachment - H4413TCA

CNC Tube cutting plasma table attachment - H4413TCA



SPECIFICATIONS


Cuttible Pipe Diameter: 1-4 inches
Single Cut Length: 4 feet
Maximum Cut Length: 5 feet
Cutting Wall Thickness: Determined by the plasma cutter
Maximum Cut Weight: 45KG
Net Weight of the Accessory: 23.5KG
Longitudinal Fixed Bevel Angle: ± 45 degrees
Include System Software Upgrade



FEATURES

Most brands of the CNC tube cutting plasma table attachments are using timing belts for transmission, but we have adopted a chuck structure, which allows for higher cutting precision.

The machine is equipped with common pipe cutting patterns, and only simple parameter settings are required to start cutting. Hardware and software upgrades are very convenient; you just need to add accessories and update the software, which can be completed in 10 minutes.

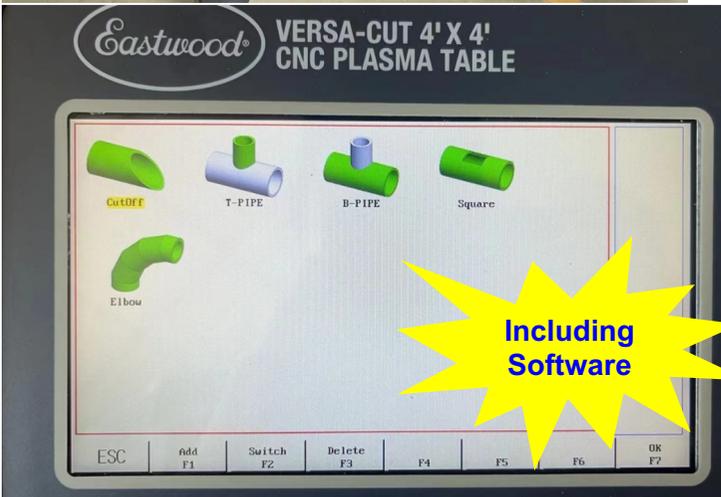

MODEL NO.: H4413TCA

MOQ: 50 piece

Packaging: Strong Brown box + inner protection

Box size: 180x20x27cm

Box weight: 26kgs

MOQ: 50pcs

MOQ: 200pcs

ONE STOP SOLUTION TOOLS 27

Bench Mark

ARCLIGHT DYNAMICS CNC Plasma Tables ▾ About ▾ Testimonials ▾ Support ▾ Contact [Get a Quote](#)

CNC Pipe and Tube Cutter with Pipefit Pro Software

Arclight Dynamics CNC tables are versatile machines allowing for use as a rotary 3 axis pipe and tube cutter through a quick 15 minute change over process. With the addition of the CNC Pipe and Tube Cutter, your CNC Plasma Table will become a multi-purpose machine, effectively saving you thousands of dollars and precious shop space.

Popular among automotive, off-road fabrication, exhaust systems, hand and guardrails, pipe fabrication, decorative gate and fencing, plumbing, mechanical contractors, facilities maintenance, food and beverage industry, musical instruments and more.

Works with both Arc Pro and Arc Max CNC Plasma Tables.

Includes Pipefit Pro Software at this price.

\$1,750.00

Select Your Table Size *

Choose an option ▾

Please indicate if your table size.






CNC Tube cutting plasma table attachment - H4413TCA

HOTECH 卓



EXCLUSIVE
USA







CNC Tube cutting plasma table attachment - H4413TCA

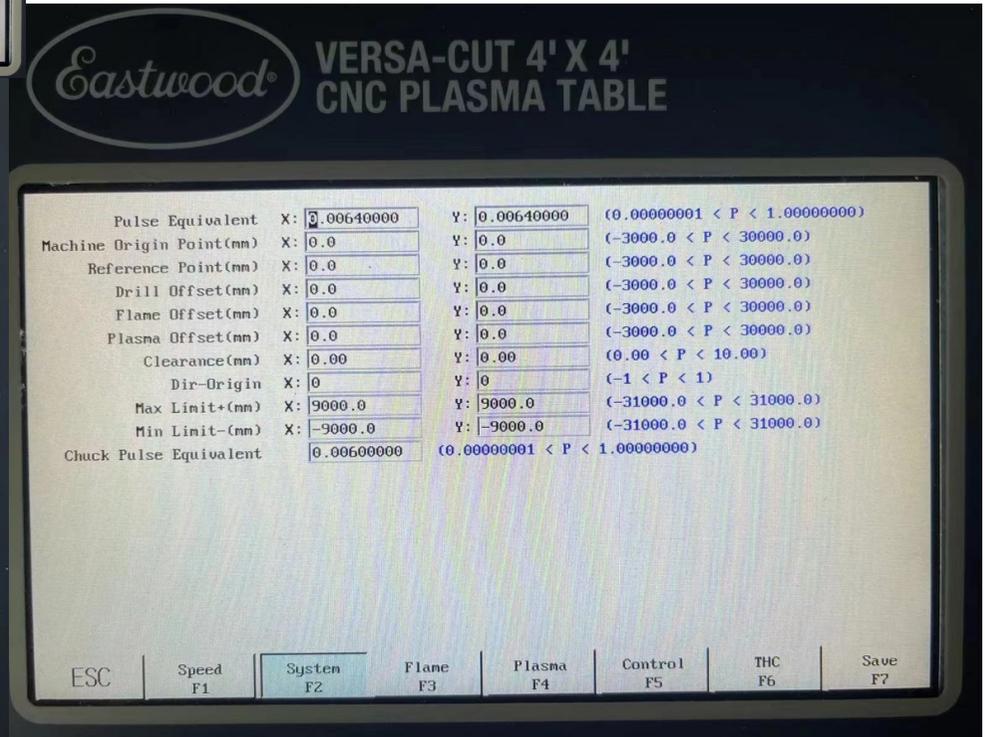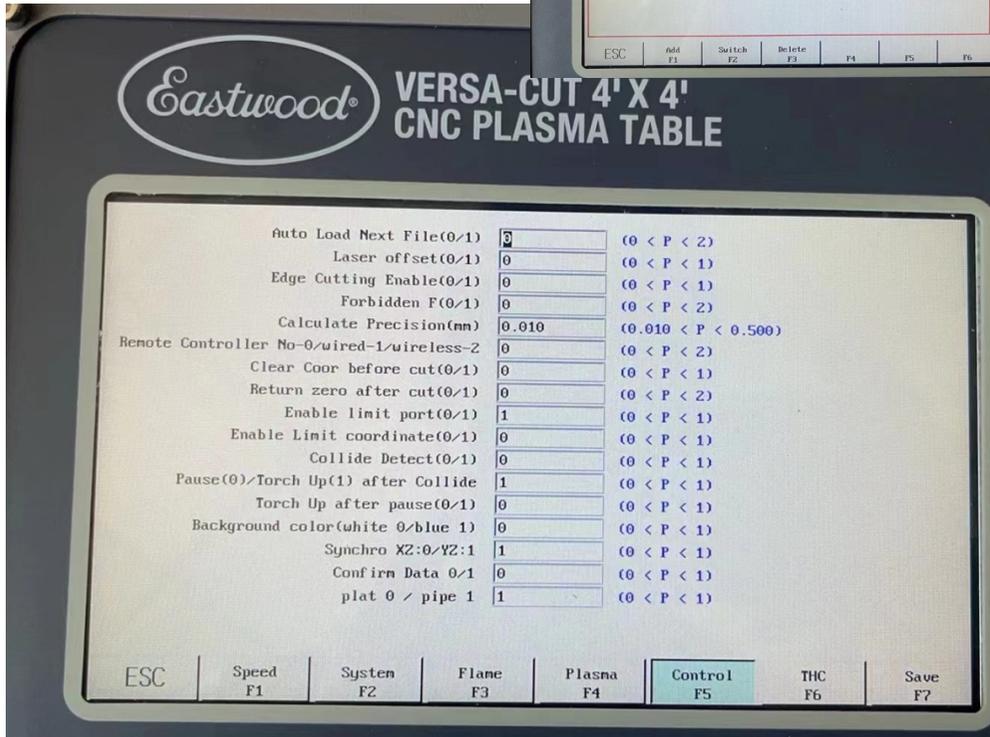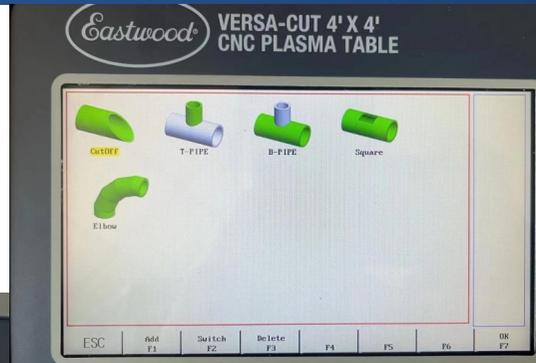

DXF Library Preview – Pre-Engineered DXF = 8 Hours+ Saved Per Custom Order

HOTECH 卓

OVER 200+
DESIGNS

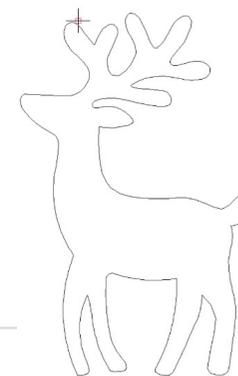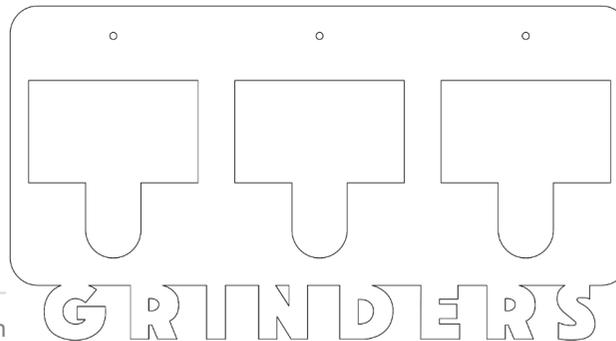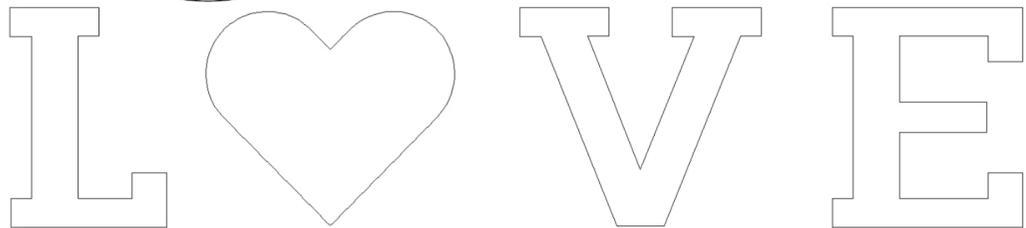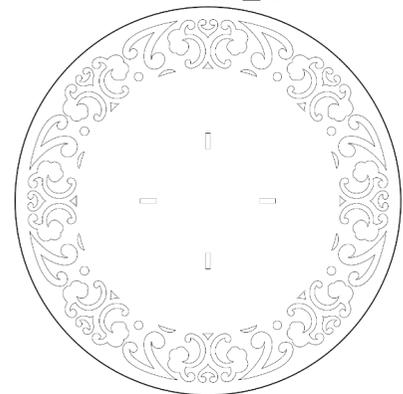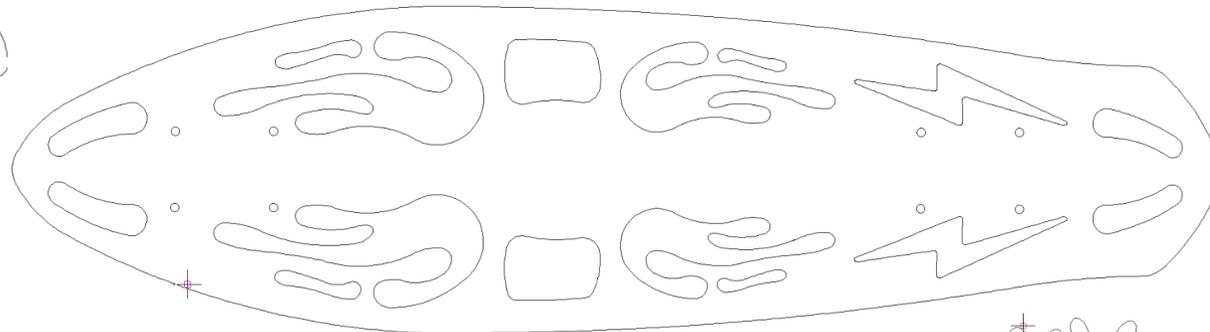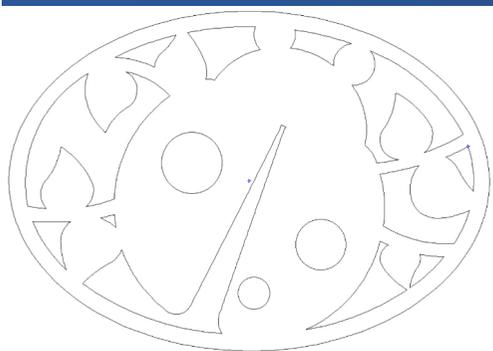

Crystal Zhao / 13282376887 HANGZHOU HAOHE TECHNOLOGY CO.,LTD. Email: crystal@h

DXF Library Preview – Pre-Engineered DXF = 8 Hours+ Saved Per Custom Order





CNC SMART CUT 50A PLASMA CUTTER with CNC Machine TORCH - H135JCNCPC

- **Affordable Power:** Low-frequency tech keeps costs down, so you get a powerful 50A cutter without breaking the bank.
- **Easy to Use:** It's simpler to operate and maintain—perfect for DIYers and pros alike, no steep learning curve.
- **Safer Operation:** Less electrical interference means a more stable cut, keeping you safe while you work.
- **Reliable Performance:** Cuts up to 11/16" carbon steel smoothly, ideal for car repairs and metal projects.

CNC SMART CUT 50A PLASMA CUTTER with CNC Machine TORCH - H135JCNCPC

HOTECH 卓

LOW
FREQUENCY



FEATURES

- WORKS WITH 120V \pm 15%50/60 OR 220V \pm 15%50/60 AC INPUT FLEXIBLE FOR ANY SHOP
- 60% DUTY CYCLE @ 50 AMPS ON 240V (60% @ 30 AMPS ON 120V)
- EASILY SLICES THROUGH METAL UP TO 11/16" (18MM) THICK
- POWERFUL 50-AMP OUTPUT WITH 60% DUTY CYCLE
- BIG DIGITAL DISPLAY FOR EASY AMPERAGE CONTROL AND INCREASED PRECISION
- ADJUSTABLE SETTINGS: GAS PREFLOW AND 2T/4T MODES
- INCLUDES MACHINE TORCH FOR INCREASED ACCURACY CUT QUALITY AND CONSUMABLE LIFE WHEN USED WITH A CNC TABLE
- 16.4FT/5M TORCH CABLE; 5FT/1.5M GROUND CABLE WITH CLAMP
- LIGHTWEIGHT AND PORTABLE AT LESS THAN 21 LBS
- EASY AIR PRESSURE CONTROL WITH BUILT-IN GAUGE
- USES COMMON CONSUMABLES—EASY TO REPLACE
- OPTIONAL HANDHELD TORCH FOR VERSATILE CUTTING
- CNC-READY WITH EXTERNAL CONTROL PORT
- RELIABLE COOLING WITH BUILT-IN FAN

INPUT POWER CORD: XN650P-B (NEMA 6-50P) PLUG WITH TWO FLAT BLADES AND ONE ROUND PIN, 12AWG (3.3MM²), TOTAL LENGTH 2.4M/7.87FT

MOQ: 500pcs

Packaging: Brown Box

REMARK: WITHOUT CERTIFICATION

ONE STOP SOLUTION TOOLS 35

PRODUCT SPECIFICATION COMPARISON




Item	H135JCNCP		CUT-40	
Machine Picture				
Input Power Supply	120V±15%50/60Hz	220V±15%50/60Hz	120V±15%50/60Hz	220V±15%50/60Hz
Rated Input Capacity	4.3 Kva	7.8 kVA	4.3 kVA	6.1 kVA
Rated Input Current	38 A	34.9 A	38.4 A	27.4 A
Rated Output Current	20A to 30 A	20A to 50 A	15A to 30 A	15A to 40 A
Rated Output Voltage	88V to 92 V	88V to 100 V	86V to 92 V	86V to 96 V
Rated No-Load Voltage	350 V	350 V	339 V	339 V
Rated Duty Cycle	60% at 30A (104°F/40°C) 100% at 20A (104°F/40°C)	60% at 50A (104°F/40°C) 100% at 30A (104°F/40°C)	60% @ 16 Amps (104°F/40°C) 100% @ 15 Amps (104°F/40°C)	60% @ 40 Amps (104°F/40°C) 100% @ 31 Amps (104°F/40°C)
Output Current Adjustment Range	20-30 A	20-50 A	15-30 A	15-40 A
Arc Voltage Output Signal Ratio	1:1:1:20:1:50:1:100			
Quality Cutting Capacity	1/64" - 5/16" (0.3 - 8 mm)	1/64" - 1/2" (0.3 - 12 mm)	1/64" - 3/16" (0.3 - 5 mm)	1/64" - 1/4" (0.3 - 6 mm)
Instant Piercing Thickness	3/16" (5 mm)	1/2" (12 mm)	3/16" (5 mm)	5/16" (8 mm)
Severance Capacity (Maximum Material Thickness)	1/2" (12 mm)	11/16" (18 mm)	1/2" (12 mm)	9/16" (14 mm)
Plasma Gas	Compressed Air			
Gas Supply Pressure	30-50 PSI	30-65 PSI	30-50 PSI	30-60 PSI
Air Requirements	5 - 7 CFM @ 30-65 psi		5 - 7 CFM @ 60 psi	
Torch Cooling Method	Air-Cooled			
Power Source Cooling Method	Fan-Cooled			
Insulation Class	Class F			
Enclosure Protection Rating	IP21S			
Machine Size (LxWxH)	16.46" x 8.5" x 13.7" (418mm×216mm×348mm)		14.06" x 8.46" x 14.69" (357mm x 215mm x 373mm)	
Machine Net Weight	20.5 lbs. (9.3kgs)		24.47 lbs. (11.1kg)	



FRONT PANEL OVERVIEW

1. Air Pressure Regulator Valve
2. Air Pressure Gauge
3. Gas Preflow Time Setting
4. 2T/4T Cutting Mode Switch
5. Multi-function Display
6. Combined Torch Power/Gas Port
7. Torch Pilot Arc Port
8. Torch Control Cable Port
9. Workpiece Ground Clamp Port
10. Multi-function Knob:
 - A. Rotate to Adjust Current
 - B. Press for Gas Check
 - C. Rotate to Set Gas Preflow Time (in Gas Preflow Mode)

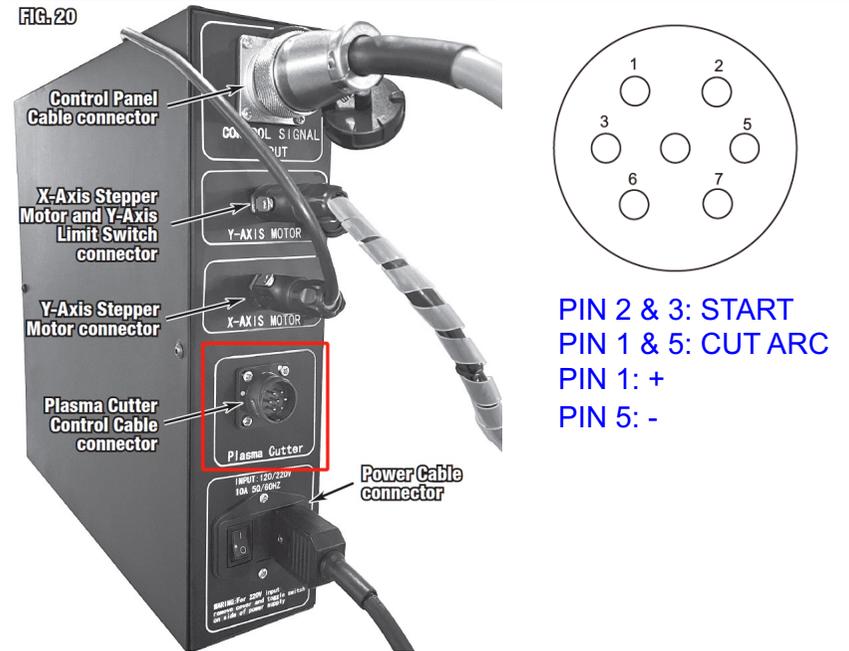

BACK PANEL OVERVIEW

1. Main ON/OFF Power Switch
2. Power Input Cable
3. External CNC Control Port (for cutting power)
4. High-Pressure Air Inlet
5. Main Unit Cooling Fan

CUTTING RESULT



VERY SMOOTH AT EDGE

CNC SMART CUT 50A PLASMA CUTTER with CNC Machine TORCH - H135JCNPC



WHAT IS INCLUDED

1. **CNC SMART CUT 50A PLASMA CUTTER**
2. **Plasma Cutter Machine Torch with 16.4ft/5M cable**
3. **Power Adapter Cable:** NEMA 5-15P to NEMA 6-50R adapter cable (flat wire, 12AWG, total length 0.33m/1.08ft)
4. **Air Hose Assembly:** IKH0876 air hose (2m/6.56ft, black rubber) 5/8-18 UNF threaded connector (D5.5×12mm) Includes one 20mm stainless steel hose clamp
5. **CNC Control Cable:** 0.5mm² 4-core sheathed cable (4m/13.12ft) Terminated with GX16-4 aviation connector on one end and Y2M-7TK industrial plug on the other
6. **300A heavy-duty Holland-style ground clamp + 10mm² × 1.5m (5ft) grounding cable**

MOQ: 500pcs

Packaging: Brown Box (51x31x41cm/14.6kgs)

ITEM # 98076 BRAND: EASTWOOD

ONE STOP



Eastwood Versa-Cut 40 CNC Plasma Cutter With Machine Torch
40 Amp Plasma Cutter designed to plug and play with the Versa Cut CNC Table
[View Full Description](#)

★★★★☆ 5.0 (1) Write a review

\$899.97 ~~\$936.98~~ Save \$37.01

Starting at \$57/mo with [affirm](#). [Check your purchasing power](#)

✓ **In Stock** Get it as early as Friday, April 11 if you order in the next 16 hr(s) 43 min(s)

Ship To: Los Angeles, US

[See our Full Selection of CNC Plasma Tables](#)



CNC Machine TORCH FOR CNC SMART CUT 50A PLASMA CUTTER - H136JACNCMT



60A @ 80% DUTY CYCLE

WHAT IS INCLUDED

- 1x CNC Machine Torch with 16.4ft/5M cable
- 2x Electrodes (1 assembled)
- 1x Cutting Tip, 0.9mm, 30-40A
- 1x Cutting Tip, 1.0mm, 40-50A (1 assembled)
- 1x Cutting Tip, 1.1mm, 50-60A
- 5m Cable

MOQ: 500PCS

PACKAGING: BROWN BOX (50x40x8.5cm/2.15kgs)

Master carton: 51x41x44cm/5pcs/11kgs



**LOW
FREQUENCY**

CNC Torch UPM 105 25' Fits Hypertherm Consumables

★★★★★ 7 Reviews

\$399.00

Starting at \$37/mo or 0% APR with Affirm. See if you qualify

1 **OUT OF STOCK**

CLICK HERE TO ADD YOUR
EMAIL TO THE WAITLIST



Eastwood Versa-Cut 40 CNC Plasma Cutter Machine
Torch

[View Product Description](#)

View reviews

\$328.99

Starting at \$30/mo with Affirm. [Check your credit before you order.](#)

✓ In Stock

Ship to [United States](#)

We do not currently ship outside USA & Canada

- 1 +

Add to Cart

See It Later

ONE STOP SOLUTION TOOLS 41

HAND TORCH FOR CNC SMART CUT 50A PLASMA CUTTER - H136JAHT

HOTECH 卓

60A @ 80% DUTY CYCLE

**LOW
FREQUENCY**



WHAT IS INCLUDED

- 1x CNC HAND Torch with **16.4ft/5M cable**
- 2x Electrodes (1 assembled)
- 1x Cutting Tip, 0.9mm, 30-40A
- 1x Cutting Tip, 1.0mm, 40-50A (1 assembled)
- 1x Cutting Tip, 1.1mm, 50-60A
- 5m Cable

MOQ: 500PCS

PACKAGING: BROWN BOX (34x31x8.5cm/2kgs)

Master carton: 35x32x52cm/6pcs/13kgs

CUT 50A PLASMA CUTTER CONSUMABLES - H136JACNCTT & H136JACNCTE



10-PIECE SET



MODEL: H136JACNCTT

CUT 50A PLASMA CUTTER Tips 10-Piece

Choose Your Size: 0.6mm / 0.8mm / 0.9mm / 1.0mm / 1.1mm

Packing: Polybag + Label

10-PIECE SET



MODEL: H136JACNCTE

CUT 50A PLASMA CUTTER Electrodes 10-Piece

Packing: Polybag + Label

140A DUAL-VOLTAGE MULTI-PROCESS WELDER - MMA/LIFT-TIG/MIG/MAG/FLUX – H1314JMW



Input rated voltage:	AC220V±15%	AC110V±15%
Output current regulation:	MIG:35A -- 140A	MIG:35A -- 100A
	TIG:15A--140A	TIG:15A--100A
	MMA:20A--140A	MMA:20A--100A
No-load voltage:	65V	65V
Rate duty cycle:	60%	60%
Efficiency:	81%	81%
Working voltage:	MIG:35A/14.5V - 140A/20V	MIG:35A/14.5V - 130A/18.5V
	TIG:15A/10.6V - 140A/15.6V	TIG:15A/10.6V - 130A/15.2V
	MMA:20A/20.8V - 140A/25.6V	MMA:20A/20.8V - 130A/25.2V
Digital display:	15---140	15---100
Welding thickness:	0.3-4mm	0.3-3.2mm
Level of protectio:	IP21S	IP21S
Dimension:	350*165*286	

WELDER COVERS – H135WC

HOTECH 卓

Premium Design



Great Idea for
keeping Welders
clean



Fits like a glove!
Perfect fit and no more worry about dust and dirt
keep a lot of dirt and paint dust off the welder.

1. Large Side Pocket for Cable Storage
Conveniently store electrical cables and other accessories in the oversized side pocket, keeping your workspace neat and organized.
2. Zippered Access for Easy Handle Use
A practical zipper design lets you expose the welder's handle for carrying while protecting the machine from dust and debris when not in use.
3. Integrated Hanging Hook
Includes a durable hook for hanging the cover when the welder is in use, preventing it from being placed on the ground and keeping it clean.

Premium Design

- Universal Fit: Accommodates cutting machines up to 60A and multi-process welders.
- High-Quality Material: Crafted from Water-resistance, heavy-duty polyester for superior durability and protection against the elements.

Hanging Hook Zippered Access for
Easy Handle Use



Large Side Pocket for
Cable Storage



Size: 22x8.5x11.22inch (560x216x285mm)

MOQ: 1000pcs

Packaging: Polybag+color card



Eastwood TIG 200 ACDC cover

TIG 200 ACDC cover
 ★★★★★ 4.8 (28) Write a review

\$29.97 ~~\$30.99~~ Save \$1.02

✓ **In Stock** Get it as early as Monday, December 46 min(s)!

Ship To: [Los Angeles, US](#)

- 1 + 

 Questions? Talk to an Expert

 1 Year Warranty Included



100% Satisfaction Guarantee:
 We stand behind our solutions and c
 • Lifetime Tech Support



Lincoln Electric Canvas Welder Covers K886-2

Welder Cover, Canvas, Red, Each

\$199.99

Part Number: LCN-K886-2

★★★★★ (2)

Only 8 left in stock - order soon

Estimated USA Ship Date: **Tomorrow**

Estimated International Ship Date: **Today**

1 
 Compare



Lincoln Electric Canvas Welder Covers KH495

Welder Cover, Canvas, Designed for Flux Core Welders, Each

\$37.99

Part Number: LCN-KH495

★★★★★ (4)

Only 6 left in stock - order soon

Estimated USA Ship Date: **Tomorrow**

Estimated International Ship Date: **Today**

1 
 Compare

MIG TIG and Plasma Welding Cart - H41331WC



- **MODEL NO.: H41221WC**
- **MOQ: 1000 pcs**

SPECIFICATION


Overall Body Size: 110×50×106cm
Top Shelf Welder Max Size: 58. 5×39. 5cm
Bottom Shelf Plasma Cutter Max Size: 75×39. 5×45cm
Total Height of the Cart adjustable: 93. 5-106cm
Gas Bottle Max Size: 24cm
Rubber Wheel Dia: 20cm
Swivel Casters with Brake Dia: 6cm
Max. Loading Capacity: 170Kgs
Packaging Size: 990x755x177mm
Weight: 31kgs

FEATURES

This heavy-duty steel welding cart is designed to hold up to 170kgs of MIG, TIG, and plasma welding equipment. Key features include:

- **Top Shelf:** Accommodates a welder, with a design that allows side access doors on MIG welders to open without removal.
 - **Middle Shelf:** Provides storage for essential welding accessories.
 - **Bottom Shelf:** Fits a plasma cutter with maximum dimensions of 75×39. 5×45cm
 - **Gas Bottle Mount:** Includes a TIG rod holder capable of storing up to six tubes of filler rods, and supports large gas bottles securely up to 240mm .
 - **Mobility:** Equipped with heavy-duty front caster wheels and molded rear wheels with brakes for easy maneuverability and stability.
 - **Cable Management:** Features 6 hooks for organized cable storage and a rear cut-out to facilitate plasma cutter cable routing.
 - **Handle:** Front-mounted, and height adjustable higher-level handle with a rubber cover ensures comfortable movement around the workspace.
 - **Durability:** Constructed with sturdy formed steel and finished with a professional orange skin black powder coat for enhanced durability.
- This cart offers a practical and organized solution for transporting and storing your welding equipment and accessories.

MIG TIG and Plasma Welding Cart - H41331WC

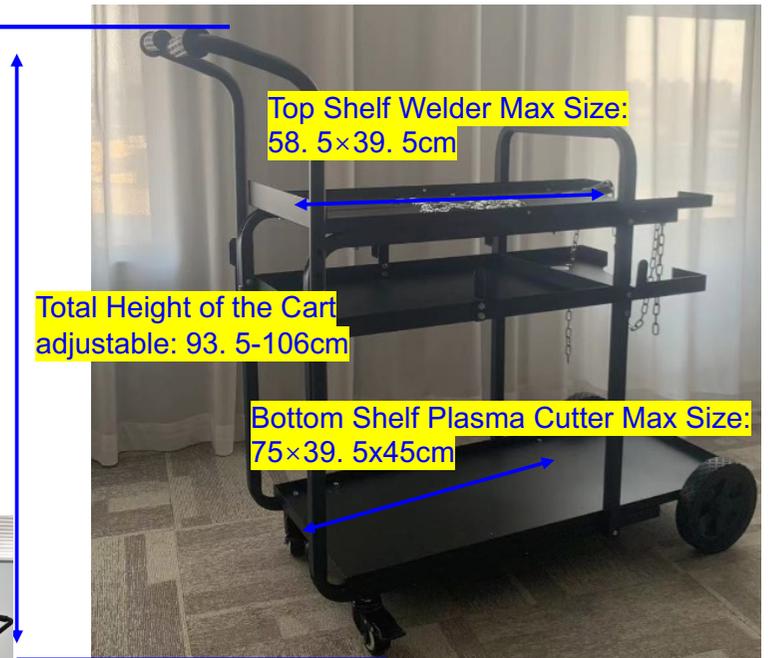



INVERTER WELDERS AND TORCHES

INVERTER STICK/TIG WELDER - H1314ST8

HOTECH 卓



➤ What's Included

- STICK/TIG welder
- Electrode holder with 5.4ft cable
- Ground clamp with 5.4ft cable
- Shoulder strap

- Digital display to allow easier setting;
- Lift TIG capability for thin material such as stainless and aluminum material
- Very portable, weights only 2.9Kg.

➤ Main Specs & Features

Technology Type	Inverter Welder	
Welding Process	STICK	Lift TIG
Output Current Range	15-80A	10-85A
Duty Cycle	30% @ 80A	30% @ 85A
Input Voltage Rating	120V AC	
Certificate Type	CSA	
Features	Built-in hot start, anti-sticking and arc force; Over heating protection & low voltage and high voltage protection	



MOQ: 500pcs

FLUX-CORE WELDER - H1314FC12

HOTECH 



➤ What's Included

- Flux-core welder
- Fixed torch with 6ft. cable
- Ground clamp with 6ft cable

MOQ: 500pcs

➤ Features

- Flux core welder, no shielding gas required
- One knob control and perfect for entry level or DIY users
- Fixed torch and ground cable make it ready-to-weld out of package
- Over heating protection & low voltage and high voltage protection
- Inverter power source - more efficient, provides smoother weld characteristics than transformer welders

➤ MAIN SPECS.:

Technology Type	Inverter Welder
Welding Process	MIG-Flux Core only
Output Current Range	30-120A;
Duty Cycle	30% @ 90A
Input Voltage Rating	120V AC
Certificate Type	CSA

From same factory which also selling to LINCOLN but Maximum Welder Output (amps): 90 amps, our model 120A



Lincoln Electric Century FC90 Flux-Cored Wire Feed Welders K3493-1

Welder, Century FC90, MIG/Flux-Cored, 120 V, 30-90 Amps, Accepts .035 in. Cored Wire, Kit

\$248.99

Part Number: LCN-K3493-1

1

Add To Cart

★★★★★ (4)

In Stock (more than 10 available)

Compare Wish List

Estimated USA Ship Date: Wednesday 12/27/2023

Estimated International Ship Date: Tomorrow

MULTI INVERTER WELDER – H1314M2LCD

HOTECH 



MOQ: 500pcs

➤ What's Included

- MIG Torch with 0.030 in. Contact Tips(2) • MIG Nozzle (1) • Flux Core Nozzle (1)
- 10 ft. **Removable Spool Gun**
- TIG Torch with sample Tungsten (1) Extra Collets #5 #6 #7
- 10 ft. Electrode Cable/Clamp • 10 ft. Ground Cable/Clamp
- 6ft.Gas Hose • Dual Gauge Regulator
- 120V Adapter Cord
- Foot Pedal

➤ Main Specs & Features

Technology Type	Inverter Welder					
Welding Process	MIG	TIG	STICK	MIG	TIG	STICK
Output Range	30-200A	10-200A	10-180A	30-90A	10-90A	10-70A
Duty Cycle	20% @ 200A	20% @ 200A	20% @ 180A	40% @ 90A	40% @ 90A	40% @ 70A
Input Voltage	240V AC			120V AC		
Certificate Type	CSA					
Features	Easy-reading LCD control screen; Built-in synergic function; 2T/4T, adjustable inductance and arc force, Over heating protection & low voltage and high voltage protection					



- Gas/no gas MIG, TIG, STICK, spool gun capability make it the “one tool that does everything” , which enables users to do different types of welding operations.
- **SYNERGY EXPERT**, embedded database with integrated welding parameters, easy to use for entry-level users
- Continuously adjustable wire feeding speed and voltage
- A must-have dual voltage model for any outlet.
- A perfect select for light industrial works.



From same factory, but better performance than this model

VULCAN

OMNIPRO 220 Industrial
Multiprocess Welder with
120/240V Input

★★★★★ (1107)

\$1,149⁹⁹

MULTI INVERTER WELDER – H1314M2LCD

Compare to Lincoln Electric K4876-1 POWER MIG 215 MPi Multi-Process Welder



Lincoln Electric K4876-1 POWER MIG 215 MPi Multi-Process Welder

Visit the Lincoln Electric Store
5.0 ★★★★★ 8 ratings

\$1,989⁹⁹

Pay \$165.83/month for 12 months, interest-free upon approval for Amazon Visa

- Multi-Process Capable - Welds MIG, Flux-Cored, Stick, and DC TIG.
- Dual Input Voltage - 120V and 230V inputs so you can plug into any common power supply.
- Ergonomic Case - Sleek and robust case design with multiple lift points for ease of mobility around the shop.
- Built in TIG Solenoid and Foot Pedal Adapter The POWER MIG 215 MPi welder is designed to accept a TIG torch, no install required.

Roll over image to zoom in



\$1,989⁹⁹

FREE delivery Friday, December 29. Details

Or fastest delivery Wednesday, December 27. Details

Deliver to Pottstown 1

Only 1 left in stock - soon.

Add to Cart

Buy Now

Ships from Freedom Trail Logistics L.L.C.

Sold by Freedom Trail

PLASMA CUTTER 20AMP – H1314PC2



MOQ: 500pcs



What's Included

- Plasma cutter
- Plasma torch with 2.5m cable
- Ground clamp with 2m cable
- Extra electrode and nozzle each 3pcs

Main Specs & Features

Processes	
Rated Input Voltage	120V
Rated Output Amp	20A
Duty Cycle (40°C)	35%@20A
Quality Cutting Thickness	6mm
Severe Cutting Thickness	10mm
Features	Over heating protection & low voltage and high voltage protection



- Reliable plasma arc initiation
- Air filter on back
- Suitable for cutting steel, iron, stainless steel, aluminum and copper
- Convenient plug-in socket, fast and safe
- Compact and light

200AMP AC/DC TIG WELDER FOR STEEL AND ALUMINUM – H1314ACDCTIG2



MOQ: 500pcs



➤ What's Included

- ACDCTIG200
- TIG torch 4m
- Ground clamp with 3m cable
- Foot pedal with 4m cable
- Regulator
- Gas hose



➤ Features

- A high-performance welding equipment is capable of Pulse TIG, AC/DC TIG, Spot TIG, HF/LIFT TIG and DC STICK.
- Advanced pilot arc technology keeps the arcs smaller and arc noise lower
- Wave form switch (square-wave, triangle-wave, sine-wave) under AC TIG mode, meet different application demands
- A fast and easy setting and switching process, which allows you to define welding parameters freely and easy to operate
- Cold weld for precision and aesthetics
- 2T/4T, reduce fatigue and improve work efficiency
- Good welding ability, suitable for Mild steel , Stainless steel , Aluminum and thin plate
- Visual slope design is easy to operate

➤ MAIN SPECS.:

		TIG	Stick
240V:	Output	10-200A	10-170A
	Duty Cycle:	200A @ 25%	170A @ 25%
120V:	Output:	10-110A	10-70A
	Duty Cycle:	110A @ 25%	70A @ 30%

NEW



SPOOL GUN - H13SP



MODEL NO.: H13SP

MOQ: 500pcs

Includes 1x K-Type wire feeder wheel 0.8/1.0mm grooves

Packaging: Color Box + EVA



More optional wire feeder wheels

K-Type **V-Type**

U-Type

SPECIFICATIONS

Compatible welding wires: Carbon steel welding wire ϕ 0.6mm to 1.0mm, FLUX welding wire ϕ 0.8mm to 1.0mm, Aluminum welding wire ϕ 0.8mm to 1.2mm
Wire feeding speed: 2-13m/min
Wire feeder voltage range: DC 2V---24V
Welding current range: 30A----160A
Welding duty cycle :X=60%
Machine Size & Weight: 380*98*330mm/ 2.8kgs
Cable: 5Meter of 8mm ² pure copper

FEATURES

Detachable Cable, better for storage
Wire feeder: Fully transparent top, easy to see the wiring conditions
Spool holder: Fully transparent with spring-loaded spool axis
Plastic casing wire feeder, universal welding machine component (easy to replace the parts, good for after sales service)
Features: Large-sized wire spool, low rotation speed, minimal wheel vibration, ensuring high wire feeding stability and smoothly, the end user will feel very well during welding.
External wire feed pressure adjustment Easy and Quicker to use.
Ergonomic design, light weight
Wire feeder: Standard equipped with K-type groove 0.8mm&1.0mm integrated (for carbon steel, stainless steel, flux-cored wires). Can also add optionally with V-type groove wire feeder (for carbon steel, stainless steel, flux-cored wires); or U-type groove wire feeder (Used for aluminum wires, as the low hardness of aluminum wires easily causes deformation and damages wire feeding, smooth U- groove to prevent wire damage). K-type groove wire feeder has a large contact area with the wire, ensuring tight grip to prevent wire slipping and no wire feeding when the wire feeder is idle
Wire feeder wheel replacement: Rotate and remove the plastic sleeve to replace the wire feeder wheel, simple easy to change.
Wire feeding speed: 2-13m/min
Continuous operation for 1 minute, working current 132~140A

SPOOL GUN - H13SP





NEW WELDING INNOVATION

HOTECH 

COMING
SOON...



NEW WELDING INNOVATION

HOTECH 



COMING
SOON...




WATER COOLED TIG WELDING TORCH – H13WP18FXTT



H13WP18FXTT

Water Cooled TIG Welding Torch

350A DC, 260A AC @ 100% Duty Cycle, EN60974-7 .020"-5/32" / 0.5mm to 4.0mm Electrodes

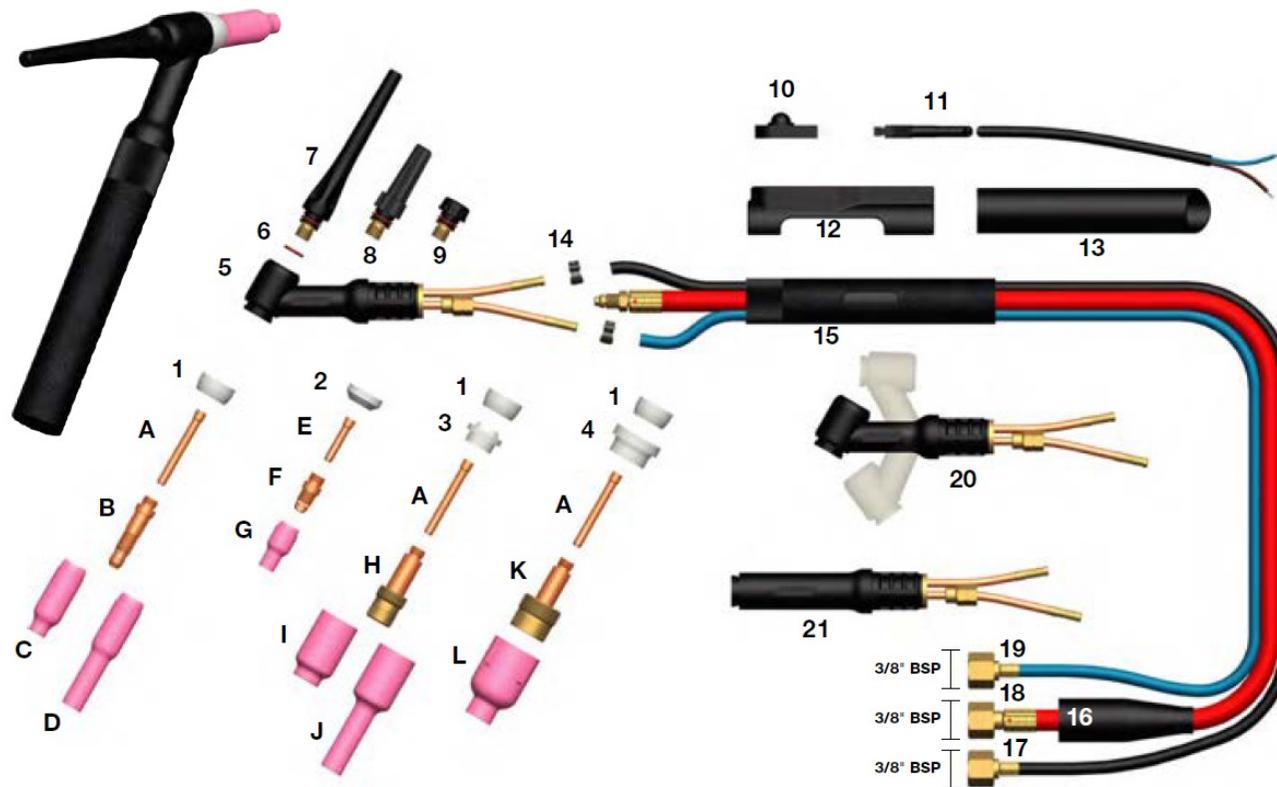

MOQ: 300PCS
Packaging: Brown Box


AIR COOLED TIG WELDING TORCH – H13WP26FXTT



H13WP26FXTT

Air Cooled TIG Welding Torch

200A DC, 150A AC @ 60% Duty Cycle, EN60974-7 .020"-5/32" / 0.5mm to 4.0mm Electrodes

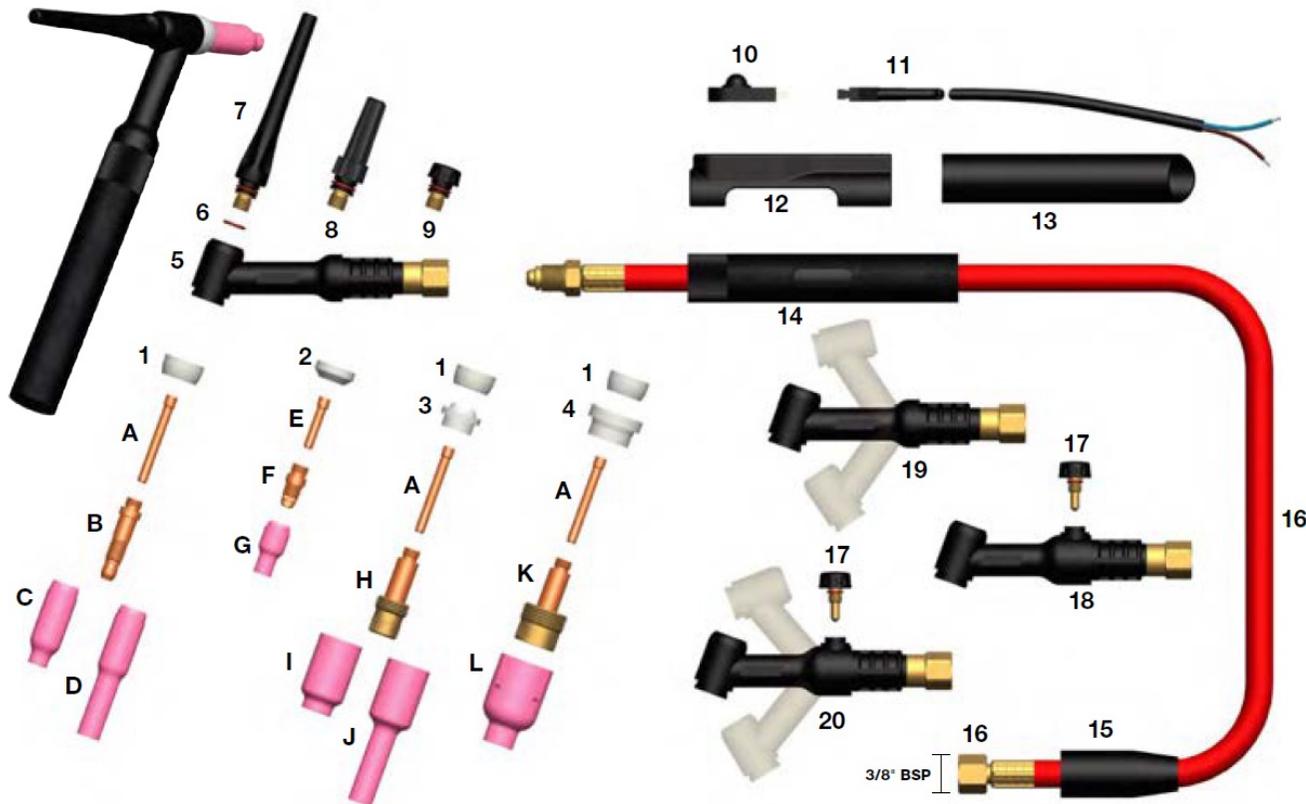

MOQ: 300PCS
Packaging: Brown Box


AIR COOLED TIG WELDING TORCH – H13WP9FXTT



H13WP9FXTT

Air Cooled TIG Welding Torch

125A DC, 100A AC @ 60% Duty Cycle, EN60974-7 .020"- 3/32" / 0.5mm to 2.4mm Electrodes

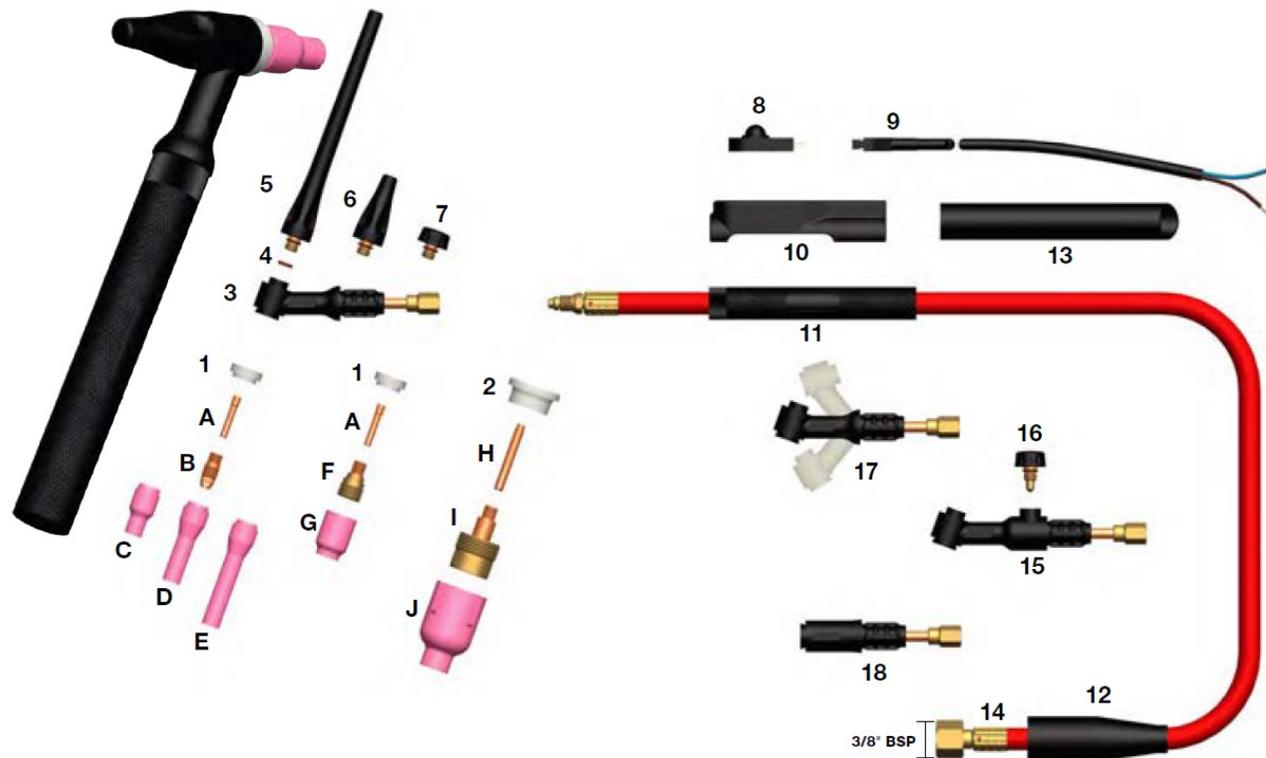

MOQ: 300PCS
Packaging: Brown Box


WATER COOLED TIG WELDING TORCH – H13WP2JFXTT



H13WP2JFXTT

Water Cooled TIG Welding Torch

250A DC, 190A AC @ 100% Duty Cycle, EN60974-7 .020"- 1/8" / 0.5mm to 3.2mm Electrodes

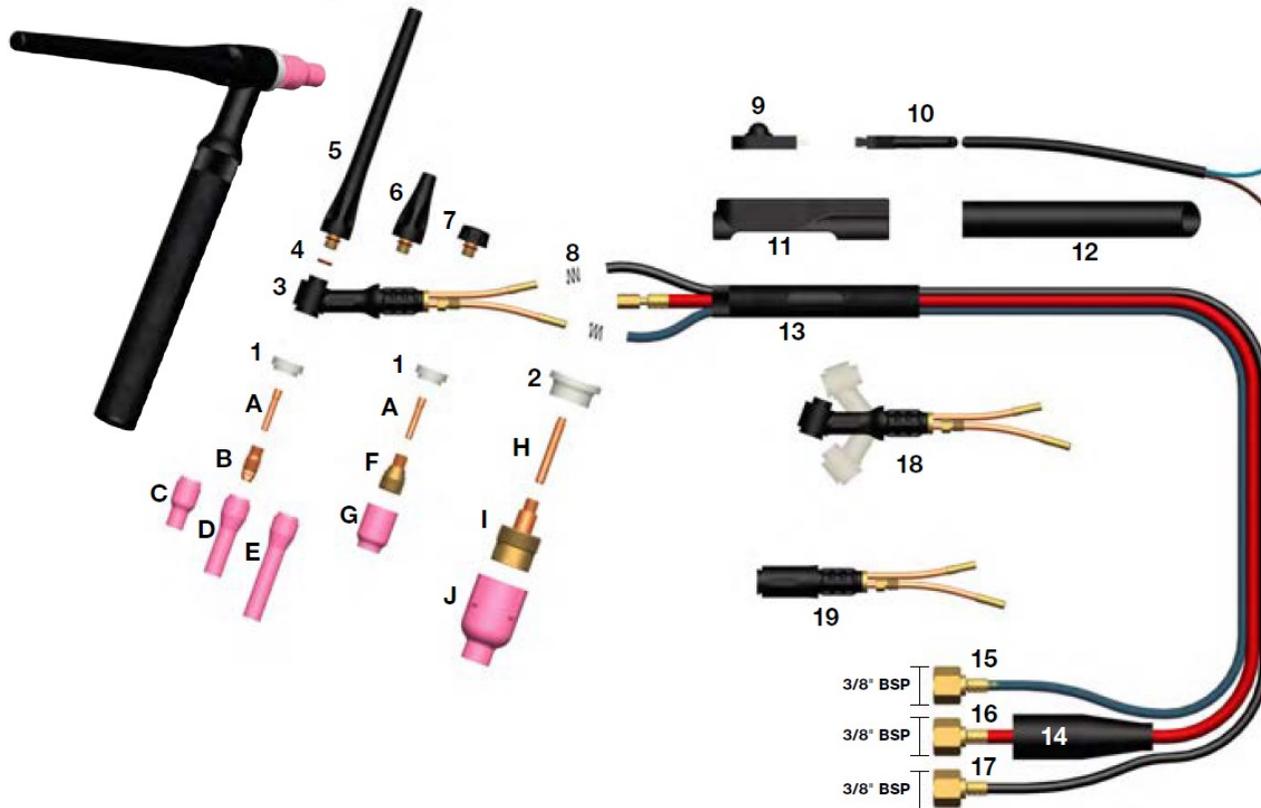

MOQ: 300PCS
Packaging: Brown Box

AIR COOLED TIG WELDING TORCH – H13WP17FXTT



H13WP17FXTT

Air Cooled TIG Welding Torch

150A DC, 115A AC @ 60% Duty Cycle, EN60974-7 .020"- 1/8" / 0.5mm to 3.2mm Electrodes



MOQ: 300PCS
Packaging: Brown Box


AIR COOLED TIG WELDING TORCH – H13WP26FXTT



H13WP26FXTT

Air Cooled TIG Welding Torch

200A DC, 150A AC @ 60% Duty Cycle, EN60974-7 .020"-5/32" / 0.5mm to 4.0mm Electrodes

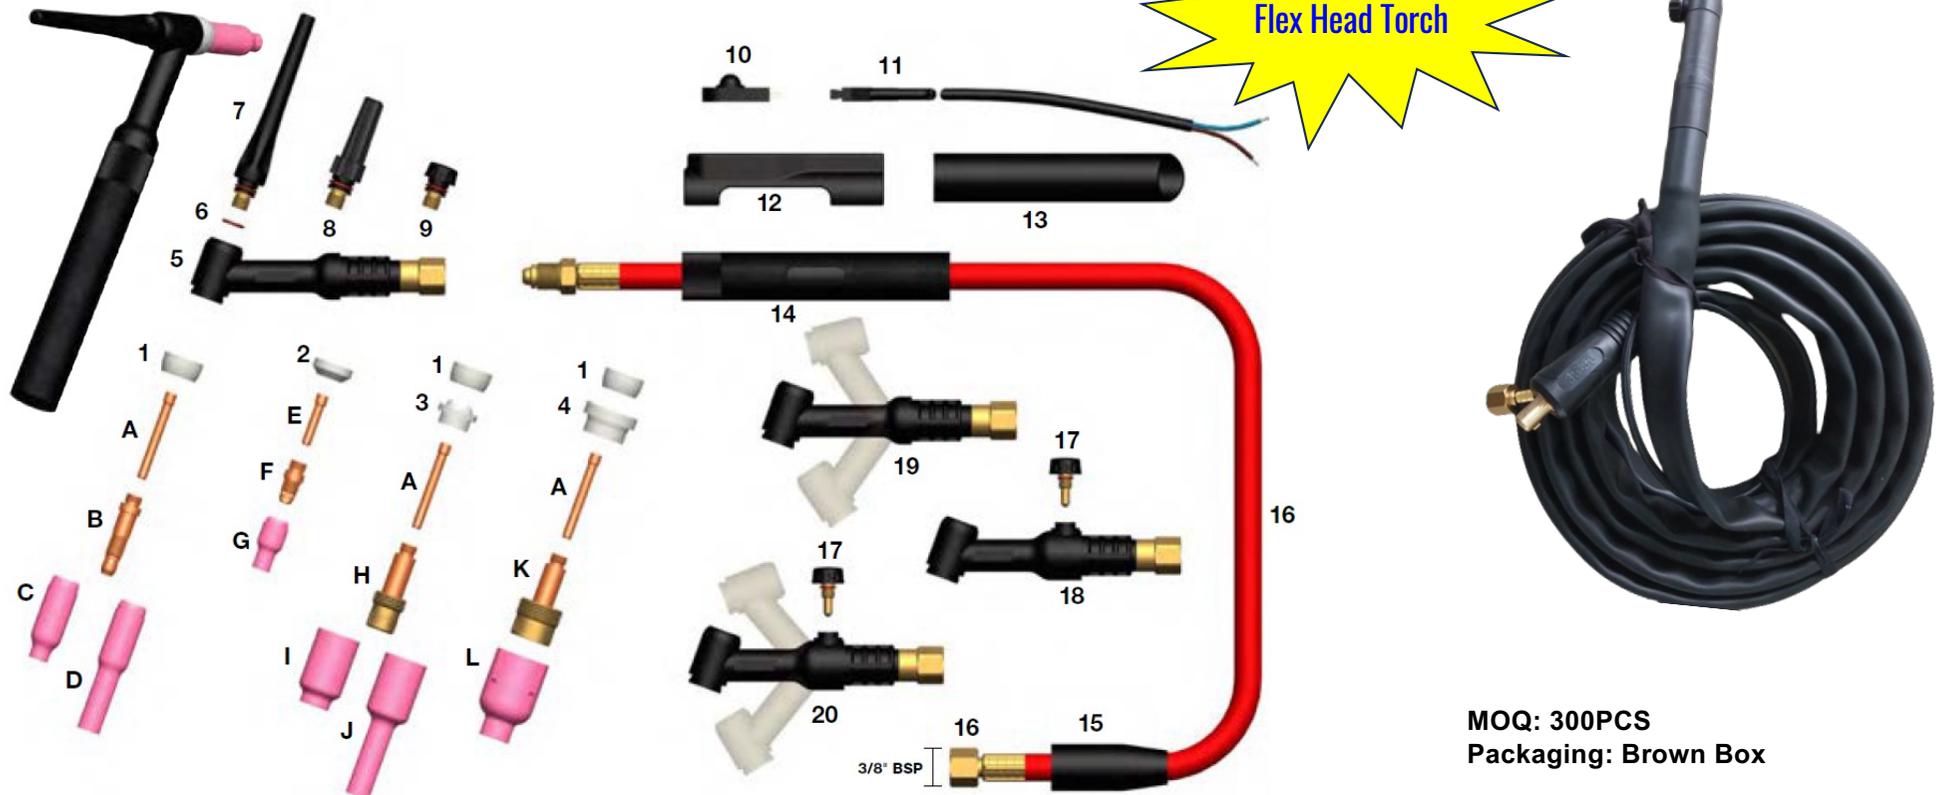


MOQ: 300PCS
Packaging: Brown Box

H13P15JAFXMT

Air Cooled MIG Torch

180A CO₂, 150A Mixed Gas @ 60% Duty Cycle, EN60974-7 .023"-.040"/0.6mm to 1.0mm Wires

UK
CA CE

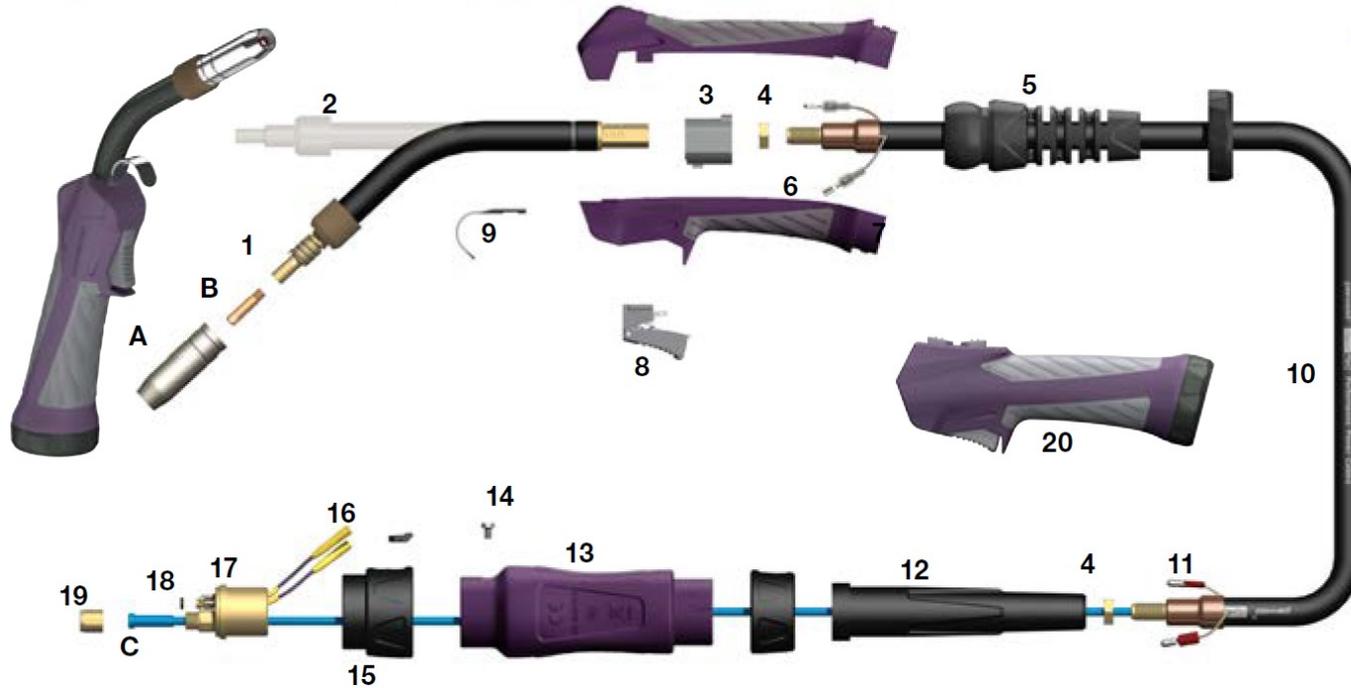

MOQ: 300PCS
Packaging: Brown Box

H13P25JAFXMT

Air Cooled MIG Torch

230A CO₂, 200A Mixed Gas @ 60% Duty Cycle, EN60974-7 .030"-.045"/0.8mm to 1.2mm Wires



Flex Head Torch

MOQ: 300PCS
Packaging: Brown Box



TUNGSTEN GRINDERS

8V Lithium Tungsten Grinder- H1334TG-2

HOTECH 卓



Power: 8V
Battery size: 2500 mAh
Charging time: 2.5 hours
Working: 45 mins
No-Load Speed: 5000-30000RPM
Packing: Color box
Size: 9*6.5*34.5
Weight: 980g

A Sharp Tungsten Will:
Increase arc control
Increase arc stability
Eliminate porosity with contaminated tungsten electrodes
Eliminate arc wander on outside corners
Create better looking, stronger and better penetrating welds with consistent and accurate tungsten prepared points

Better TIG Welds in Seconds! Works with 5 different 0.040", 1/16", 5/64", 3/32", 1/8" tungsten's.

**New Design of the head
5 brass nuts can be changed each angle**

Improved with More Power & Less Vibration than Ever!
Dust free design

Dustproof design

Installation Steps



MODEL NO.: H1334TG-2

MOQ: 1000pcs

8V Lithium Tungsten Grinder- H1334TG-2

HOTECH 卓



MODEL NO.: H1334TG-2

MOQ: 1000pcs



Eastwood Elite TG2000 Cordless TIG Welder Tungsten Grinder for TIG Welding

12 Volt Lithium Ion Cordless Portable Tungsten Grinder will Improve Your TIG Welding

★★★★★ 4.5 (23) Write a review

\$109.97 ~~\$149.99~~ Save \$40.02

Buy in monthly payments with Affirm on orders over \$50. [Learn more](#)

✓ In Stock

Ship To: [Hangzhou, CN](#)

We do not currently ship outside USA & Canada

- 1 +

Add to Cart



Selling Price: US\$149.99

Promotion Price: US\$109.97

Yearly Quantity: 20000pcs



GRINDING TUNGSTEN BENCH GRINDER vs TUNGSTEN GRINDER

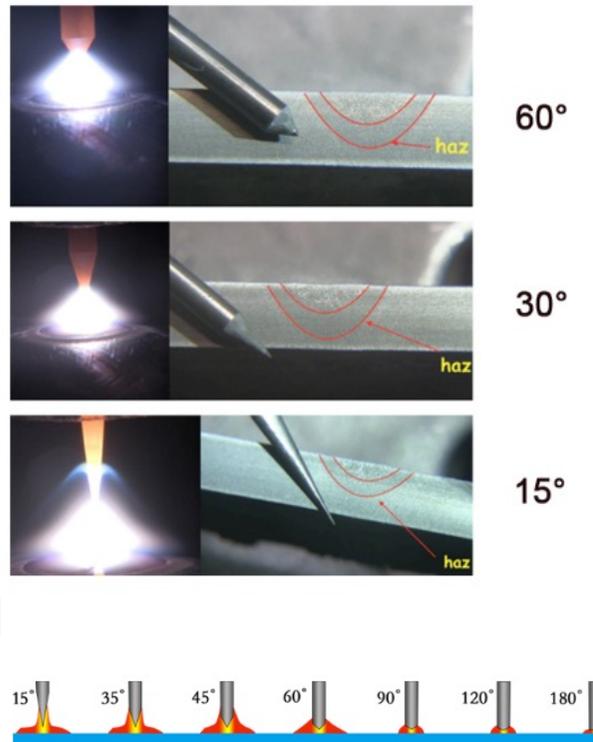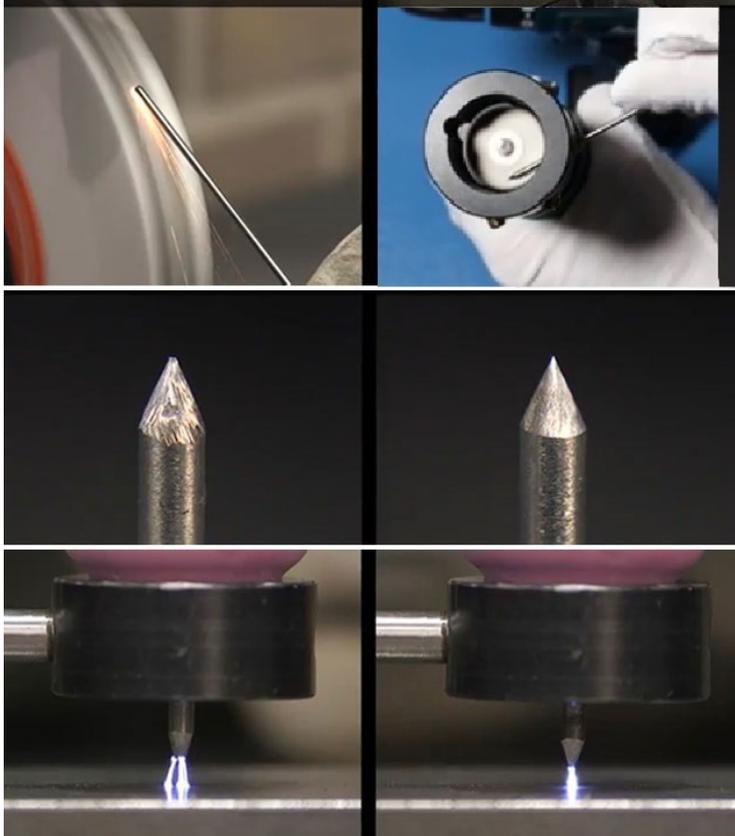

**EASY TO USE AND SHARPENS
OVER 200 TUNGSTENS**

Works with all color tungsten's
**Works with 0.04"; 1/16"; 5/64 " , ;
 3/32" and 1/8" tungsten
 Grinds 10°; 15°; 20 °;22.5° and
 25 ° angles**

Designed to create the optimum
rpm for the diamond sharpening
wheel

Diamond wheel is double sided for
long life

Sharpen over 200 tungsten's (100
each side)

New and improved unit with more
power and less vibration for even
better welds

12V Lithium Tungsten Grinder- H1334TG-12



Digital Display of
Speed and Battery status

Power: 12V
Battery size: 2000mA
Charging time: 2.5 hours (Charging
current $\geq 2A$)
Working: around 30mins
No-Load speed: 5000-30000RPM
Speed setting: 6
Weight: 630g

A Sharp Tungsten Will:
Increase arc control
Increase arc stability
Eliminate porosity with contaminated tungsten
electrodes
Eliminate arc wander on outside corners
Create better looking, stronger and better penetrating
welds with consistent and accurate tungsten prepared
points

**Better TIG Welds in Seconds! Works with 5 different
0.040", 1/16", 5/64", 3/32", 1/8" tungsten's.**

**New Design of the head
5 brass nuts can be changed each angle**

Improved with More Power & Less Vibration than Ever!
Dust free design

Start and Stop in one second
6 Speeds available

**Easy and quick sharpen tungsten in 6-8 seconds
Hanger and tool bag for easy storage**



New Design of the head
5 brass screws can be
changed each angle



Dustproof design

Installation Steps



Including:
1x 12V Tungsten Grinder
1x Tungsten Grinder HEAD with 5 brass screws
1x 2-sided diamond wheel installed
1x Mandrel installed
1x Type-C Cable
1x Storage Tool bag
Color box

**MODEL NO.: H1334TG-2
MOQ: 1000pcs**

12V Lithium MULTI Grinder WITH TUNGSTEN GRINDER- H1334TG-13M



Digital Display of Speed and Battery status



Power: 12V
Battery size: 2000mA
Charging time: 2.5 hours (Charging current $\geq 2A$)
Working: around 30mins
No-Load speed: 5000-30000RPM
Speed setting: 6
Weight: 630g

A Sharp Tungsten Will:
Increase arc control
Increase arc stability
Eliminate porosity with contaminated tungsten electrodes
Eliminate arc wander on outside corners
Create better looking, stronger and better penetrating welds with consistent and accurate tungsten prepared points

Better TIG Welds in Seconds! Works with 5 different 0.040", 1/16", 5/64", 3/32", 1/8" tungsten's.

**New Design of the head
5 brass nuts can be changed each angle**



Improved with More Power & Less Vibration than Ever!
Dust free design

Start and Stop in one second
6 Speeds available

Easy and quick sharpen tungsten in 6-8 seconds
Hanger and tool bag for easy storage



Including:
1x 12V Tungsten Grinder
1x Tungsten Grinder HEAD with 5 brass screws
1x 2-sided diamond wheel installed
1x Mandrel installed
42x Accessories
1x Type-C Cable
1x Storage Tool bag
Color box

MODEL NO.: H1334TG-13M
MOQ: 1000pcs



WELDING TABLES & PLASMA CUTTING TABLES

Heavy Duty Plasma Cutting Table & Welding Table



OVERVIEW

Heavy Duty Plasma Cutting Table & Welding Table



HD WELDING TABLE SUM-900238

Table Top Size: 36" x 24"
Max. Loading: 1200Lbs

WARNING:
This product can expose you to chemicals including Di (2-ethylhexyl) phthalate, lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



HD PLASMA CUTTING TABLE SUM-900239

Table Top Size: 35.4" x 23.6"

WARNING:
This product can expose you to chemicals including Di (2-ethylhexyl) phthalate, lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



Logo and Color Concept

Heavy Duty Plasma Cutting Table & Welding Table

Welding table Top &
Plasma cutting table Top
INTERCHANGABLE

Table Top
detachable



Heavy Duty WELDING TABLE- H1319WT23N



16mm Hole
Space: 50.8mm


Flatness: less than 0.015inch/0.38mm

Hangers for hanging tools

Handle

Tool tray for storage

4pcs 360 degrees 3" Casters with
Lock

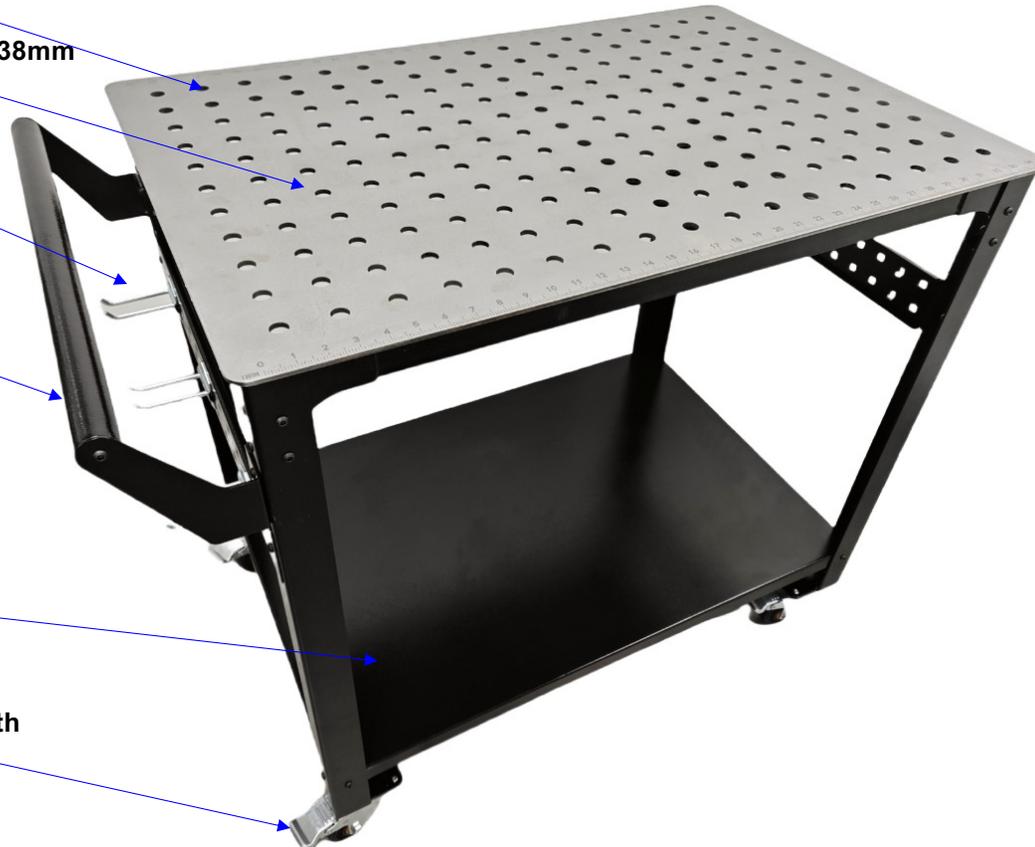

SPECIFICATION



5mm Steel top
Flatness: less than 0.015inch/0.38mm
Size: 920*600*890mm
Weight: 54kgs
Packaging Size: 990*693*220cm

MODEL NO.: H1319WT23N

MOQ: 500pcs



Heavy Duty WELDING TABLE- H1319WT23N

HOTECH 卓

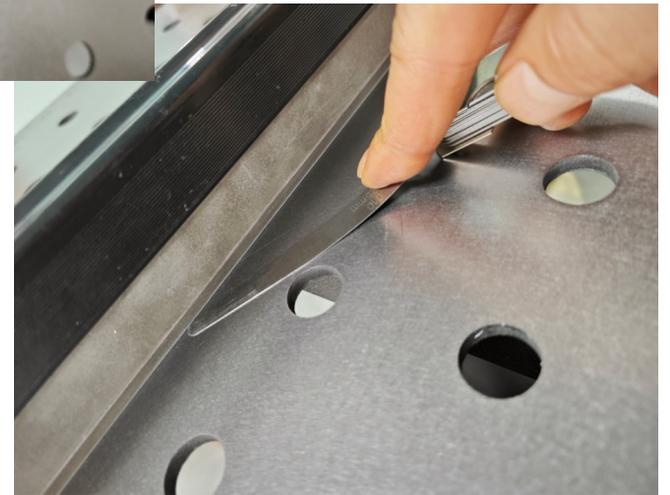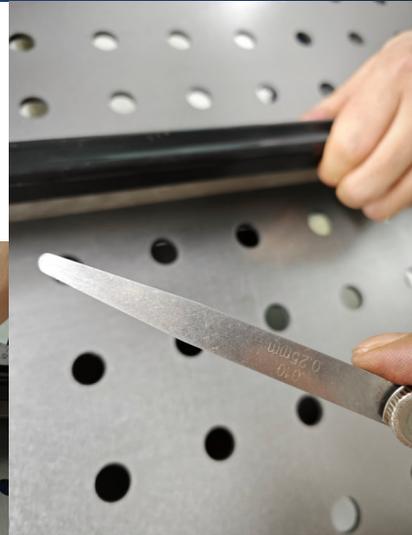

Heavy Duty WELDING TABLE- H1319WT23N

HOTECH 卓

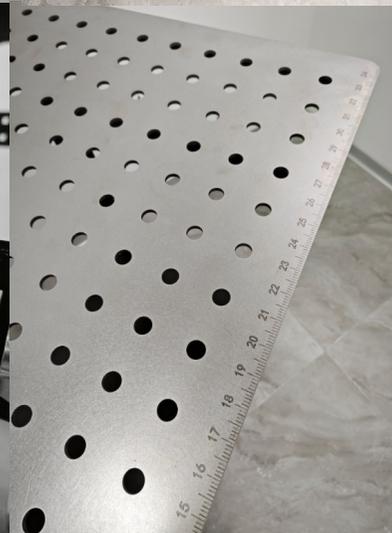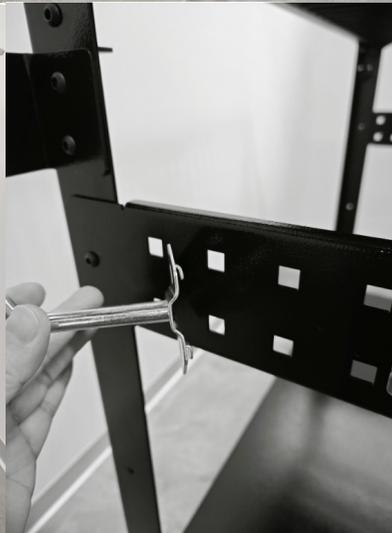

Heavy Duty PLASMA CUTTING TABLE- H1314PT23N



Handle

Teeth Slats



SPECIFICATION

Slat slots: 25.4mm; T: 2mm; 23pcs

Size: 900*600*884mm

Weight: 39kgs

Packaging Size: 965*667*215cm

Tool Tray for storage and hanging tools

4pcs 360 degrees 3" Casters with Lock

MODEL NO.: H1314PT23N

MOQ: 500pcs

Heavy Duty PLASMA CUTTING TABLE- H1314PT23N



Heavy Duty PLASMA CUTTING TABLE- H1314PT23N



Heavy Duty Packaging Solutions – Strong US paper + EVA Foam Protection

HOTECH 卓



Heavy Duty PLASMA CUTTING TABLE with Spat Drawer- H1314PT23N-SD



Handle

Teeth Slats

Tool Tray for storage and hanging tools

4pcs 360 degrees 3" Casters with Lock

with Spat
Drawer

SPECIFICATION

Slat slots: 25.4mm; T: 2mm; 23pcs


Size: 900*600*884mm

Weight: 39kgs


Packaging Size: 965*667*215cm

MODEL NO.: H1314PT23N

MOQ: 500pcs

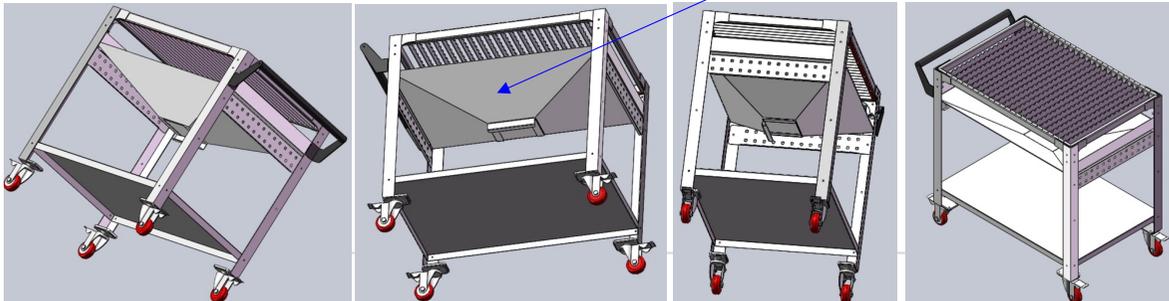

WELDING TABLE FIXTURES

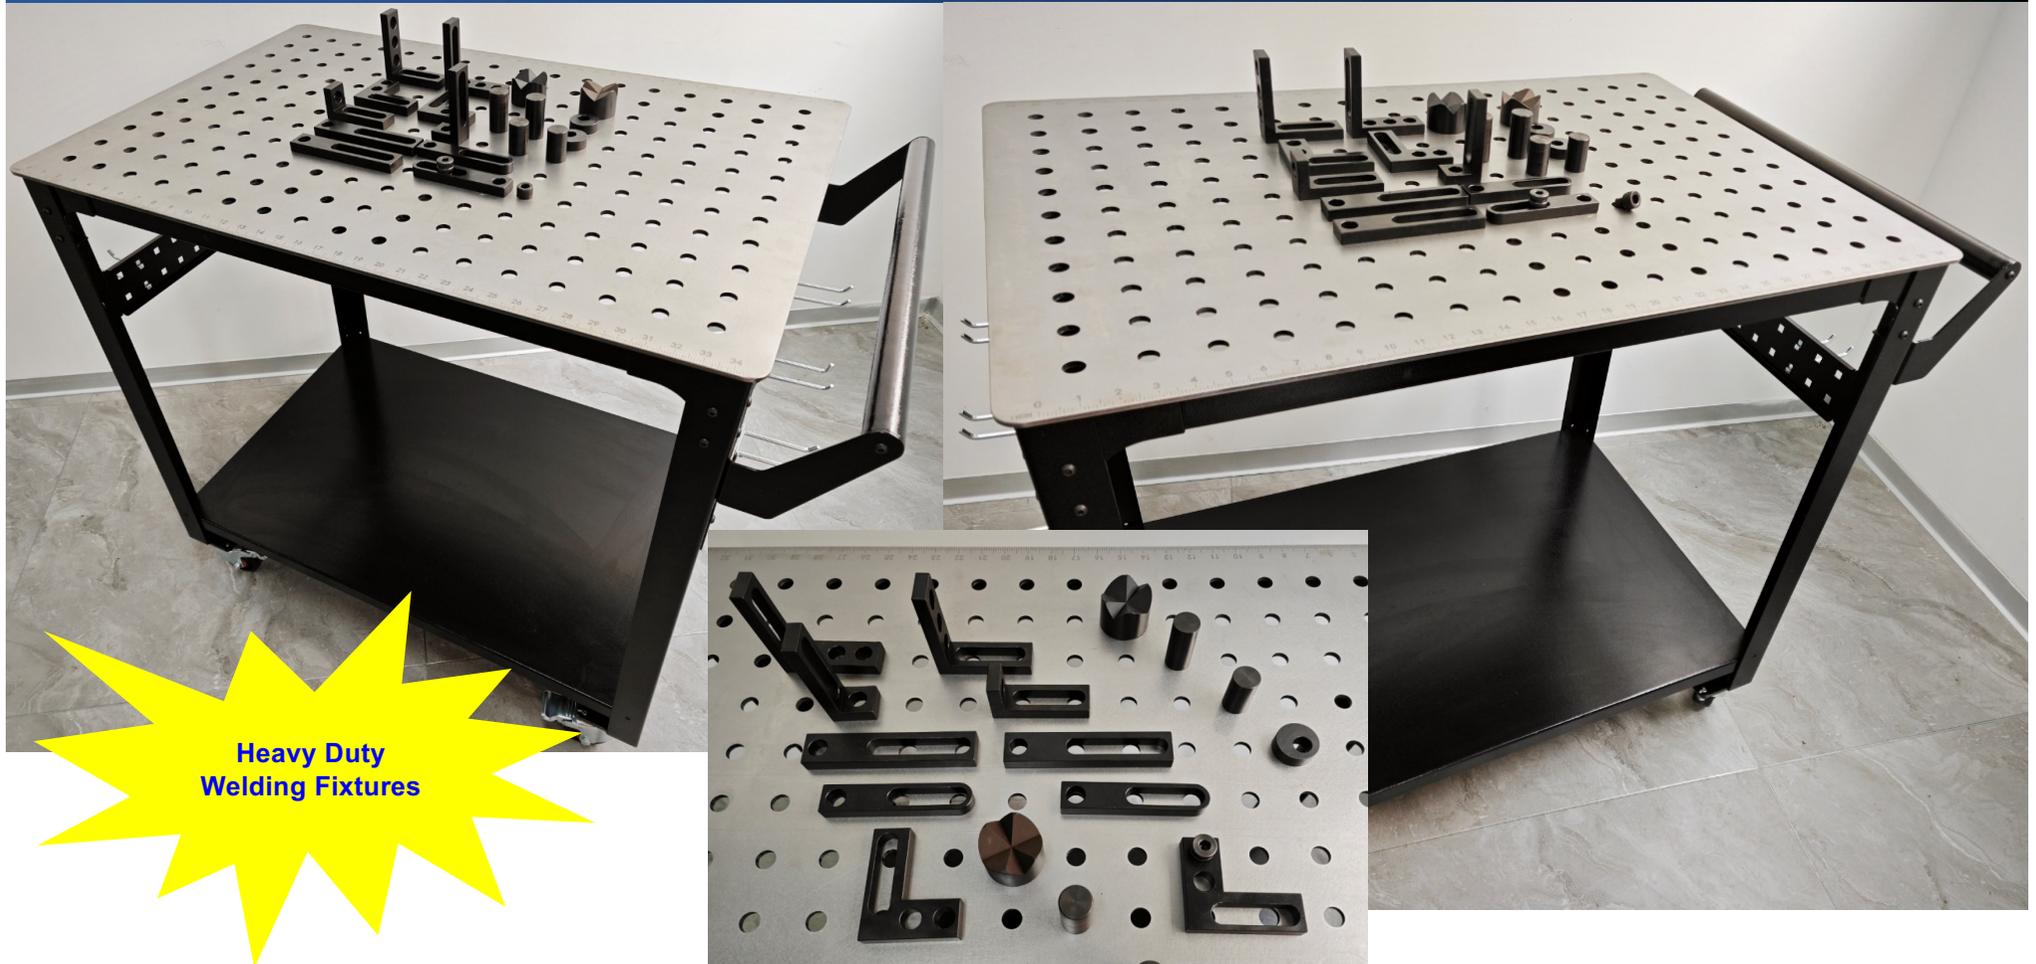

**Heavy Duty
Welding Fixtures**



Locating Angles

Size: 41 x 91 x 30mm

Slot Length: 51mm

Thickness: 12mm

Hole: 5/8" (16mm)

Weight: 0.2kg

Material: **Steel**

Surface Treatment: Black

- **MODEL NO.: H1LA**
- **MOQ: 1000 pcs**

How to use?





Locating Angles

Size: 91 x 91 x 30mm

Slot Length: 51mm

Thickness: 12mm


Hole: 5/8" (16mm)

Weight: 0.3kg

Material: **Steel**

Surface Treatment: Black

- **MODEL NO.: H2LA**
- **MOQ: 1000 pcs**





Leveling Ruler

Size: 150 x 30 x 12mm

Slot Length: 90mm

Thickness: 12mm

Hole: 5/8" (16mm)

Weight: 0.2kg

Material: **Steel**

Surface Treatment: Black

- **MODEL NO.: H3LR**
- **MOQ: 1000 pcs**

How to use?





Plane angle ruler

Size: 90x75x12mm

Slot Length: 51mm

Thickness: 12mm

Hole: 5/8" (16mm)

Weight: 0.15kg

Material: **Steel**

Surface Treatment: Black

- **MODEL NO.: H4AR**
- **MOQ: 1000 pcs**

How to use?





Type V positioning - D58x90 degree

Size: Diameter Φ 50x35mm-90°/120°

Diameter: 5/8"(16mm)

Weight: 0.3kg

Material: Steel

Surface Treatment: Black

- **MODEL NO.: H5VP**
- **MOQ: 1000 pcs**



Fixed Length Ball Lock Bolt (1.1" Capacity), T55015, BuildPro
★★★★☆ ~ 13
\$22⁸⁰

Quick locking pin

Size: Φ 5/8"X1.7" (Diameter*High)

0.75inch Capacity

Diameter: 5/8" (16mm)

Weight: 0.1kg

Material: Steel

Surface Treatment: Nitriding

- **MODEL NO.: H15QLP**
- **MOQ: 1000 pcs**



How to use?

WELDING TABLE FIXTURE - H9-11S / H9-22S



Workbench Stops

Item.	Material	Surface Treatment	OD	High	Thread	Weight
H9-11S	Steel	Black	25mm	38mm	9/16-18UNF	190g
H9-22S	Steel	Black	25mm	50mm	9/16-18UNF	230g

- **MODEL NO.: H9-11S**
- **MOQ: 1000 pcs**

- **MODEL NO.: H9-22S**
- **MOQ: 1000 pcs**

Strong Hand Tools BuildPro Workbench Stops T54203

Workbench Accessories, BuildPro Stop Bar, 1 in. Diameter, 1.50 in. Tall, Each **\$7.99**

Part Number: VTR-T54203 Add To Cart

★★★★★ (2)

In Stock (more than 10 available) Compare Wish List

Estimated USA Ship Date: Today
Estimated International Ship Date: Today

Strong Hand Tools BuildPro Workbench Stops T54205

Workbench Accessories, BuildPro Stop Bar, 1 in. Diameter, 2 in. Tall, Each **\$9.99**

Part Number: VTR-T54205 Add To Cart

★★★★★ (2)

In Stock (more than 10 available) Compare Wish List

Estimated USA Ship Date: Today
Estimated International Ship Date: Today

Note: Add nut, it can be fixed on the 3/16" table



Workbench Stops

Item.	Material	Surface Treatment	OD	High	ID	Weight
H9-1S	Steel	Black	25mm	38mm	16mm	180g
H9-2S	Steel	Black	25mm	50mm	16mm	220g

- **MODEL NO.: H9-1S**
- **MOQ: 1000 pcs**

- **MODEL NO.: H9-2S**
- **MOQ: 1000 pcs**

Note: the stops tend to rock/lean for 3/16" table



Strong Hand Tools BuildPro Workbench Stops T54203

Workbench Accessories, BuildPro Stop Bar, 1 in. Diameter, 1.50 in. Tall, Each

\$7.99

Part Number: VTR-T54203

1

Add To Cart

★★★★★ (2)

In Stock (more than 10 available)

Compare Wish List

Estimated USA Ship Date: Today

Estimated International Ship Date: Today



Strong Hand Tools BuildPro Workbench Stops T54205

Workbench Accessories, BuildPro Stop Bar, 1 in. Diameter, 2 in. Tall, Each

\$9.99

Part Number: VTR-T54205

1

Add To Cart

★★★★★ (2)

In Stock (more than 10 available)

Compare Wish List

Estimated USA Ship Date: Today

Estimated International Ship Date: Today



Eccentric Block

Size: $\Phi 38\text{mm} \times 12.7\text{mm}$

Hole: $\Phi 5/8''$ (16mm)

Thickness: 1/2inch

Weight: 0.1kg

Material: Steel

Surface Treatment: Black

- **MODEL NO.: H16EB**
- **MOQ: 1000 pcs**





FAB Stop

Size: 5inch*1inch

Hole: Φ 5/8" (16mm)

Thickness: 1/2inch

Weight: 0.1kg

Material: Steel

Surface Treatment: Black



CertiFlat 5 Inch FabStop (32295)

\$20.99

- **MODEL NO.: H17FABS**
- **MOQ: 1000 pcs**

WELDING TABLE FIXTURE – H6IP



Insert Plier – H6IP

Diameter: 5/8"(16mm)

Material: Forging Steel

Hardness: HRC32-40

Clamping Pressure:300 lbs.

Surface Treatment: Plating Nickel



New design, Not Lean



Size	Total Length	MOQ(Pcs)
2" (50MM)	7"(180MM)	1000
3"(80MM)	10"(250MM)	1000
4"(100MM)	12"(300MM)	1000
6"(150MM)	13"(350MM)	1000

Strong Hand Tools Inserta Pliers T28-60010
 Workbench Accessories, PRO28 Inserta Pliers,
 100mm Clamping Length, 5mm to 75mm
 Clamping Range, Each **\$42.75**

Part Number: VTR-T28-60010 **Add To Cart**

Not Yet Reviewed
 Will be special ordered for you Compare Wish List

If you need, We have other sizes available

WELDING TABLE FIXTURE - H7AC





V-Grooves Angle Clamping Tool – H7AC

Material: Forging Steel

Hardness: HRC32-40

Clamping Pressure:300 lbs.

Surface Treatment: Plating Nickel

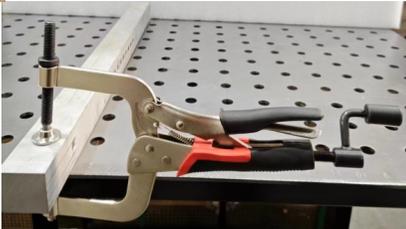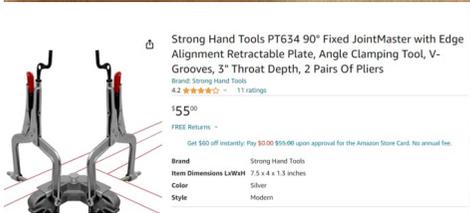

Size	Total Length	Opening Size	MOQ(Pcs)
3"(80MM)	3.94"(100MM)	3.5"	1000
3"(80MM)	4.13"(105MM)	4"	1000
3"(80MM)	4.33"(110MM)	4.33"	1000

If you need, We have other sizes available

WELDING TABLE FIXTURE – H8IC



Soft Handle



New design, Not Lean

Insert Clamp – H8IC

Diameter: 5/8" (16mm)

Material: Forging Steel

Hardness: HRC32-40

Clamping Pressure: 300 lbs.

Surface Treatment: Plating Nickel

Throat Depth	Track Size	Total Length	MOQ(Pcs)
3.15"(80MM)	15.5*7.5MM	220MM	1000
3.15"(80MM)	15.5*7.5MM	280MM	1000
3.15"(80MM)	15.5*7.5MM	360MM	1000
4"(100MM)	19.2*9.5MM	300MM	1000
4"(100MM)	19.2*9.5MM	350MM	1000
4.72"(120MM)	22*10.6MM	300MM	1000
4.72"(120MM)	22*10.6MM	380MM	1000



Strong Hand Tools BuildPro Inserta-Clamps UEN5200

Utility Clamp, Inserta-Clamp, Nickel Chrome Plated, Steel, 400 lbs. Rating, 8.5 in. Clamp, Each

\$31.99

Part Number: VTR-UEN5200

★★★★★ (1)

Only 1 left in stock - order soon

Estimated USA Ship Date: Today
Estimated International Ship Date: Today

1


Add To Cart

Compare Wish List

If you need, We have other sizes available

ONE STOP SOLUTION TOOLS 104

WELDING TABLE FIXTURE – H9IC

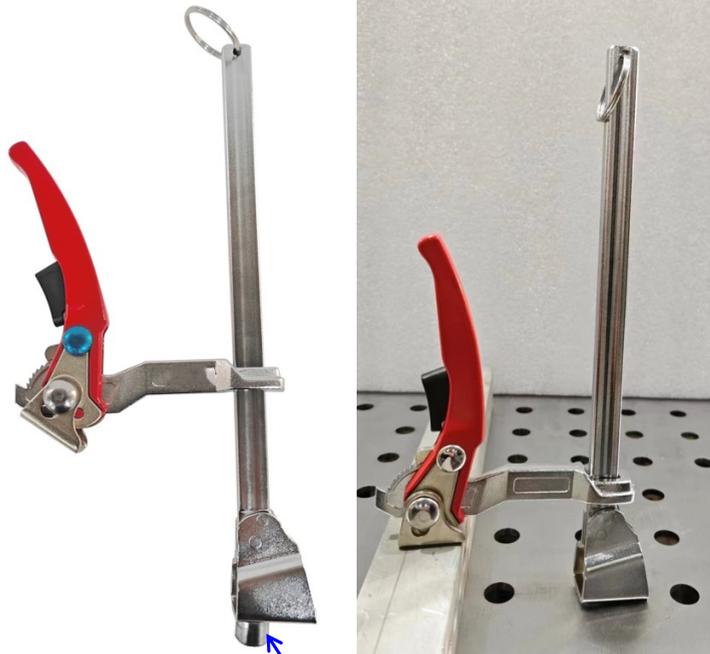

Insert Clamp – H9IC

Diameter: 5/8"(16mm)

Material: Forging Steel

Hardness: HRC32-40

Clamping Pressure:300 lbs.

Surface Treatment: Plating Nickel

Throat Depth	Track Size	Total Length	MOQ(Pcs)
3.15"(80MM)	15.5*7.5MM	220MM	1000
3.15"(80MM)	15.5*7.5MM	280MM	1000
3.15"(80MM)	15.5*7.5MM	360MM	1000
4"(100MM)	11.2*9.5MM	300MM	1000
4"(100MM)	11.2*9.5MM	350MM	1000
4.72"(120MM)	22*10.6MM	300MM	1000
4.72"(120MM)	22*10.6MM	380MM	1000



New design, Not Lean

Inserta Clamp, 05/8 Insert,
Ratchet Handle, 4" Throat Depth,
UERN5200, BuildPro

★★★★☆ ~ 4


\$42⁰⁰

If you need, We have other sizes available

WELDING TABLE FIXTURE – H11BC



Soft Handle

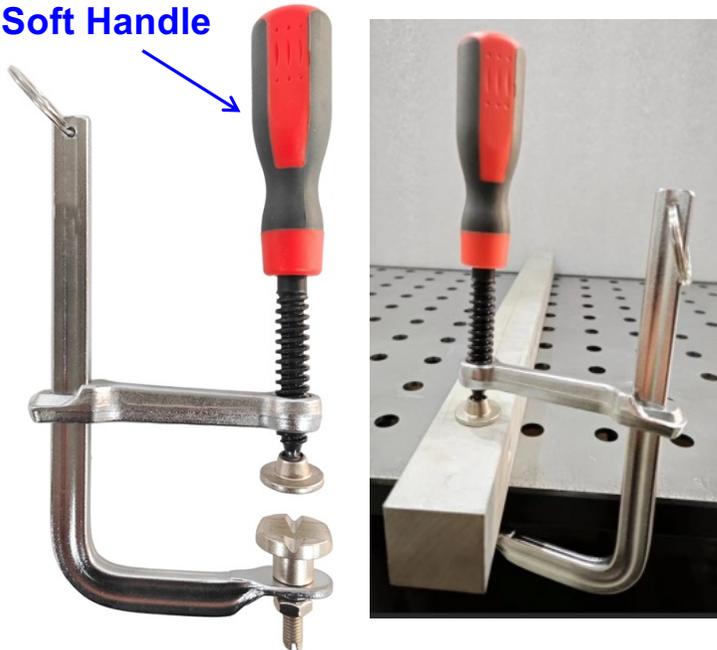

V-Grooves Bar Clamp – H11BC

Material: Forging Steel

Hardness: HRC32-40

Clamping Pressure: 300 lbs.


Surface Treatment: Plating Nickel

High X Throat Depth	Track Size	MOQ(Pcs)
4.72"*3.15"(120X80MM)	15.5X7.5MM	1000
6.3"*3.15"(160X80MM)	15.5X7.5MM	1000
7.87"*3.15"(200X80MM)	15.5X7.5MM	1000
9.84"*3.15"(250X80MM)	15.5X7.5MM	1000
11.8"*3.15"(300X80MM)	15.5X7.5MM	1000
15.74"*3.15"(400X80MM)	15.5X7.5MM	1000



Strong Hand Tools Medium Duty Bar Clamp, Capacity: 6-1/2", Clamping Pressure: 1,000 LBS, Throat Depth: 4-3/4", Rail Size: ...
★★★★★ - 47
\$30⁰⁰

If you need, We have other sizes available

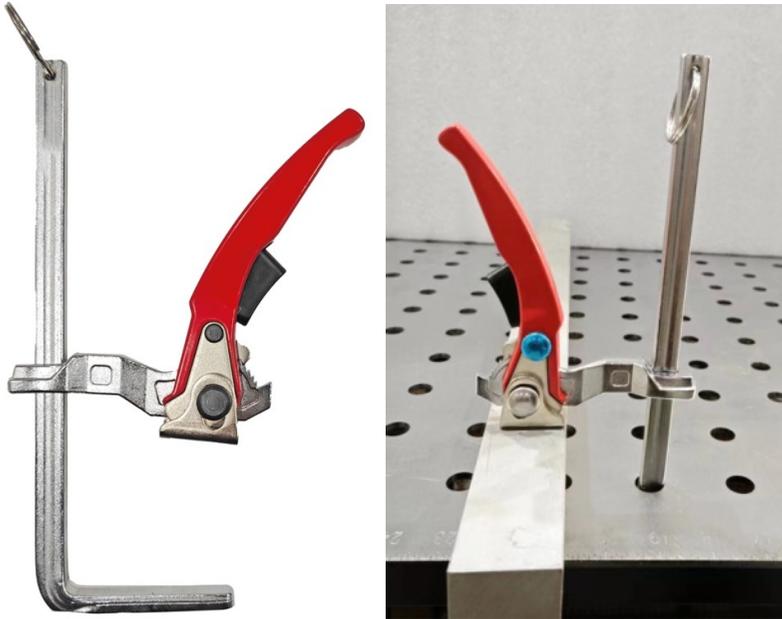

V-Grooves Bar Clamp – H12BC

Material: Forging Steel

Hardness: HRC32-40

Clamping Pressure: 300 lbs.

Surface Treatment: Plating Nickel

High X Throat Depth	Track Size	MOQ(Pcs)
4.72"*2.36"(120X60MM)	13.5X6.5MM	1000
6.3"*2.36"(160X60MM)	13.5X6.5MM	1000
7.87"*2.36"(200X60MM)	13.5X6.5MM	1000
9.84"*2.36"(250X60MM)	13.5X6.5MM	1000
11.8"*2.36"(300X60MM)	13.5X6.5MM	1000
15.74*2.36"(400X60MM)	13.5X6.5MM	1000

If you need, We have other sizes available

WELDING TABLE FIXTURE - H13SC

HOTECH 



180 degree spiral compressing (rubber handle)

Size: 170*150*150mm (6inch)

Diameter: 5/8"(16mm)

Weight: 1kg

Material: Steel

Surface Treatment: Nitriding

- **MODEL NO.: H13SC**
- **MOQ: 500 pcs**



45 degree spiral compressing (rubber handle)

Size: 170*150*150mm (6inch)

Diameter: 5/8"(16mm)

Weight: 0.83kg

Material: Steel

Surface Treatment: Nitriding

- **MODEL NO.: H14SC**
- **MOQ: 500 pcs**

Heavy Duty Sheet Metal Magnets (Twin Pack) - H186HDSMM



Heavy Duty Sheet Metal Magnets
High: 3."(81.5mm)
Diameter: Φ 3.46"(88mm)
Straight Pull Force: **100 LBS / each (45 kg)**

1. Ideal for positioning and holding sheet metal for butt welding.
2. Hold sheet metal and automotive metal panels firmly in a positive location for cutting, welding, tacking, painting and repair operations.
3. Rare earth disc magnets in the magnetic plate have superior gripping power. Rubber Pads on the Sheet Metal Magnets provide friction for increased drag force in sheet metal handling applications.
4. Use horizontally or vertically. The strong, generously sized soft grip handle makes placing, moving, and removing the Sheet Metal Magnets fast and easy.
5. Can fix car film.

Bench Mark



Strong Hand Tools, Heavy Duty Sheet Metal Magnets (Twin Pack), MCB82
Visit the Strong Hand Tools Store
Search this page

\$89⁹⁶

Get \$10 off instantly: Pay \$79.66 ~~\$89.66~~ upon approval for the Amazon Store Card. No annual fee.

Brand	Strong Hand Tools
Shape	Round
Number of Pieces	2
Pull Force	100 Pounds
Manufacturer	Strong Hand Tools

About this item

- Straight Pull Force: 100 LBS / ea. (45 kg)
- Ideal for positioning and holding sheet metal for butt welding.

MODEL NO.: H186HDSMM
MOQ: 500 Pair
Packaging: Poly Bag + Color Card

Heavy Duty Sheet Metal Magnets (Twin Pack) - H186HDSMM



Soft grip
Handle





WELDING HELMETS

WELDING HELMET - H99WH

HOTECH 



Model: H99WH shining black
Optical Class:1 / 1 / 1 / 1 (TRUE COLOUR)
Viewing Area: 100*98mm (3.94X3.54")
Arc Sensor:4
Light State: DIN 4
Dark State: Variable shade, 5-8/9-13
Shade Control: External, Variable
Power Supply: Solar cell. Battery change required
2×CR2450 lithium battery
Grinding Function :YES
Low Volume Alarm: YES

1. true color for clear vision
2. large viewing area
3. with sensitivity, delay time stepless adjust knob external
4. with low volume alarm
5. shade 5~8,9~13, good for cutting, welding, grinding

- **MODEL NO.: H99WH**
- **MOQ: 1000 pcs**

WELDING HELMET - H980WH

HOTECH 



Model: H980WH shining black / Graphic
Viewing Area: **98×80mm true color**
Cartridge Size: 133×115×10mm
Arc Sensor: 4
Dark State: 5-8/9-13
Power Supply: Solar cell. 1 of CR2450
Battery can be changed
Grinding Function: YES
Low Volume Alarm: YES
ADF self-check: NO

1. Panoramic viewing
2. PC injected cover lens, anti-scratch for longer lifetime
3. true color for clear vision
4. big viewing area
5. Digital ADF with LCD display for easy welding
6. with low volume alarm
7. shade 5~8, 9~13, good for cutting, welding, grinding

- **MODEL NO.: H980WH**
- **MOQ: 1000 pcs**

WELDING HELMET - H95WH

HOTECH 



Model: H95WH matt black / with graphic
Optical Class:1 / 1 / 1 / 2
Viewing Area:98×62mm true color
Arc Sensor:4
Dark State: Variable shade, 9 ~13, internal adjust
Power Supply: Solar cell. Battery change required 2×CR2450 lithium battery
Switching Time:1/25000S, from Light to Dark
Dark to Light:0.1-1.0S by infinitely dial knob
Low Amperage TIG:≥5amps(DC),≥5amps(AC),
Grinding Function :YES
Low Volume Alarm: YES
ADF self-check: YES

1. Panoramic viewng
2. true color for clear vision
3. big viewing area
4. battery changeable for long time using
5. with low volume alram
- 6.shade 5~8,9~13, good for cutting, welding, grinding

- **MODEL NO.: H95WH**
- **MOQ: 1000 pcs**

WELDING CURTAIN SET WITH FRAME AND CASTER - H18184WCS

WELDING CURTAIN SET WITH FRAME AND CASTER - H18184WCS

HOTECH 卓

MOQ: 1000pcs, change to 500pcs
PACKAGING: POLY BAG + Brown Box

SGS EN 25980

Including:


SUMMIT logo in WHITE

Metal ring for protection.

1* Welding curtain (RED COLOR) (0.4mm/ 1.8x1.8m)

1* Portable Metal Frame

4* Casters with brake

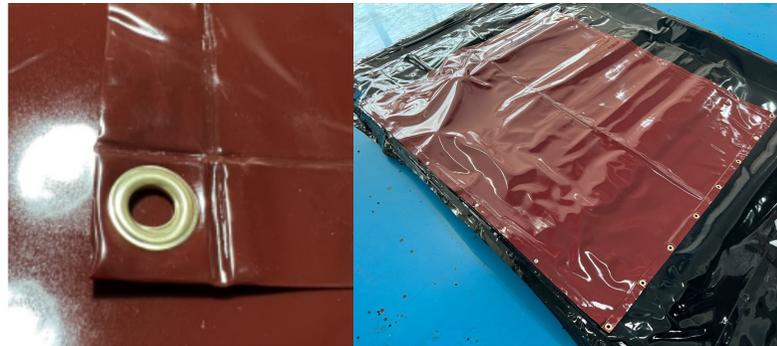


Metal Ring for protection

0.0157" (0.4mm) Thickness
70.86" * 70.86" (1.8x1.8m)



Bag thickness:0.16mm

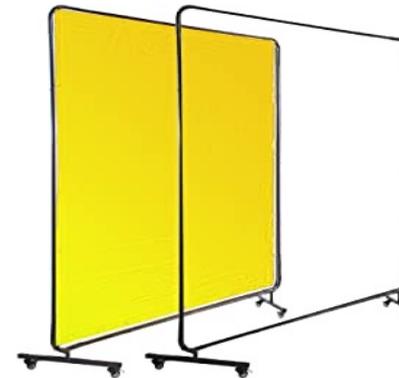

1.8x1.8m Curtain Frame



Casters with Brake

ONE STOP SOLUTION TOOLS 117

WELDING CURTAIN SET WITH FRAME AND CASTER - H18184WCS

HOTECH 



LOW NOISE



DURABLE



**360° SWIVEL
WITH BRAKE**

WELDING BLANKET

24OZ WELDING BLANKET – H24WB

HOTECH 

SGS



MSDS
www.msds-online.com.cn



EN 13501 / IMO PART 1 / NFPA 701 / BS 476



Description:

Welding Blanket
(24oz Glass fiber fabric)
with eyelets on 4 sides

WELDING BLANKET

Material: Acrylic coated fiberglass faric

Temperature: 550℃

Thickness: 0.3 ~ 1.2mm

Size: 1mx1m ~ 20mx20m

Colors: Red, Yellow, Blue, Green, White, Grey

Custom sizes are available.

Application: provide protection from spark, spatter in welding, cutting, grinding, and so on. It can withstand mid-intensity spark and low-grade slag.

Size

H24WB 4' X 6'

MOQ: 1000pcs

**PACKAGING:
POLY BAG+COLOR CARD**

16OZ WELDING BLANKET – H16WB

HOTECH 卓

SGS

MPA
Dresden



MSDS
www.msds-online.com.cn



EN 13501 / IMO PART 1 / NFPA 701 / BS 476



Description:

Welding Blanket Temperature: 300°
(16oz carbonized felt)
with eyelets on 4 sides

CARBON FELT MAT

Material: tear resistant Carbon fiber

Application : cutting or welding protection

Size: Custom sizes

Ideal for protection from torch flame during plumbing applications and protection on soldering bench.

It is scratch free if to work with it on delicate surfaces or covering fragile objects.

Please note it is not electrically conductive.

Size

H16WB 18"x18"

MOQ: 1000pcs

**PACKAGING:
POLY BAG+COLOR CARD**

ONE STOP SOLUTION TOOLS 121



PERSONAL PROTECTIVE EQUIPMENT



14" Welding Gloves
Large black palm guard
Full lining
Fireproof thread stitching



14" Black Welding Gloves,
Straight thumb reinforcement
Full lining
Fireproof thread stitching

LEATHER WELDING APRON

HOTECH 



Leather Welding Apron
Fireproof thread sewing
61*107CM

ONE STOP SOLUTION TOOLS 125

LEATHER SLEEVES

HOTECH 



Golden leather sleeves
Velcro style
45cm long
Fire-retardant stitching

WELDING JACKET



Welding Jacket
Full leather
Fire-retardant stitching

SHORT FOOT COVER

HOTECH 



Golden short foot cover
Velcro style
15cm long
Fire-retardant stitching

LONG LEG CAP

HOTECH 



Gold Long Leg Caps
Self-Styling
30cm long
Fire-retardant stitching

WELDING PANT

HOTECH 



Golden 1/2 Weltd Pants
Cotton belt + inserted button design
Fire-retardant stitching

THANK YOU